# POWER RELAY 1 POLE—3, 5 A (MEDIUM LOAD CONTROL)

# **JY SERIES**

#### ■ FEATURES

- UL, CSA, VDE recognized
- High sensitivity and low power consumption
- High isolation
- Wide operating range
- DIL pitch terminals
- Plastic sealed type
- Socket mounting type and socket available
- Compatible with solid state relays type SJ (see page 365, 366) in size and pin (terminal) arrangement
- Lead Free since date code: 0514-Please see page 6 for more information
  \* some part numbers still contain cadmium and are not RoHS compliant



Lead Free / RoHS compliant\*

#### ORDERING INFORMATION

[Exam	Example] $\frac{JY}{(a)} \xrightarrow[*]{} \frac{12}{(b)} \frac{H}{(c)} \frac{E}{(d)} - \frac{K}{(e)} \frac{P^{*2}}{(f)}$					
(a)	Series Name	JY : JY Series				
(b)	Nominal Voltage Refer to the COIL DATA CHART					
(c) Contact Style Nil : 3 A (Single contact) H : 5 A (Single contact) W : 3A (Bifurcated contact)		H : 5 A (Single contact)				
(d)	Contact Material	Nil : Gold-plate silver cadmium oxide (single type) Nil : Gold overlay silver alloy (bifurcated) E : Silver cadmium oxide (single type)				
(e)	Enclosure	K : Plastic sealed type				
(f)	Terminal Classification	Nil : PC board mounting type P : Socket mounting type (without JY-W)				

Note: 1. Actual marking omits the hyphen (-) of (\*)

2. Actual marking omits the P of (\*2)

1

#### ■ SAFETY STANDARD AND FILE NUMBERS

UL508 (Flle No. E56140) C22.2 No. 14 (File No. LR35579)

VDE 0435 (File No. 11039-4940-1014)

Please request when the approval markings are required on the cover and/or relay recognized by SEV is required.

Туре	Nominal voltage	Contact rating
JY-H, JY-HE	4.5 to 48 VDC	1/8 HP 125 VAC/250 VAC 5 A 30 VDC/250 VAC, resistive Pilot duty C 150
JY, JY-W, JY-E	4.5 to 48 VDC	1/10 HP 125 VAC/250 VAC 3 A 30 VDC/250 VAC, resistive Pilot duty D 150

#### ■ SPECIFICATIONS


ltem		3 А Туре			5 А Туре			
			JY-( ) W-K	JY-( ) -K	JY-( ) E-K	JY-( ) H-K	JY-( ) HE-K	
Contact	Arrangeme	nt	1 form A (SPST-NO)					
	Material		Gold-overlay silver alloy	Gold-plate silver cadmium oxide	silver cadmium oxide	Gold-plate silver cadmium oxide	silver cadmium oxide	
	Style		Bifurcated	Single				
	Resistance (initial) (at 1A 6 VDC)		Maximum 30	mΩ	Max. 100 m $\Omega$	Max. 30 m $\Omega$	Max. 100 m $\Omega$	
	Rating (resistive)		3 A 250 VAC or 3 A 30 VDC 5 A 250 VAC or 5 A 30 VDC					
	Maximum	Carrying Current	5 A					
	Maximum Switching Power		750 VA, 90 W			1,250 VA, 150 W		
	Maximum Switching Voltage		250 VAC, 150 VDC					
	Maximum Switching Current		3 A			5 A		
	Minimum S	Switching Load*1	0.1 mA 100 mVI	DC 10 mA 5 VDC	100 mA 5 VDC	10 mA 5 VDC	100 mA 5 VDC	
Coil	Nominal Power (at 20°C)		0.2 W (48 V type: 0.36 W)					
	Operate Power (at 20°C)		0.1 W (48 V type: 0.17 W)					
	Operating Temperature		-40°C to +90°C (no frost) (48V type: +80°C)					
Time Value	Operate (at nominal voltage)		Maximum 6 ms					
	Release (at nominal voltage)		Maximum 3 ms					
Insulation	Resistance (at 500 VDC)		Minimum 1,000 MΩ					
	Dioloctric	between open contacts	750 VAC 1 minute					
		between coil and contacts	Standard type 2,000 VAC 1 minute					
	Surge Strength		Standard type 4,000 V (at $1.2 \times 50 \ \mu s$ )					
Life	Mechanical		$2 \times 10^{7}$ operations minimum					
	Electrical		$1 \times 10^{5}$ operations minimum (contact rating)					
Other	Vibration	Misoperation	10 to 55 Hz (double amplitude of 1.5 mm)					
	Resistance	Endurance	10 to 55 Hz (double amplitude of 4.5 mm)					
	Shock Resistance	Misoperation	100 m/s <sup>2</sup> (11±1 ms)					
		Endurance	1,000 m/s <sup>2</sup> (	6±1 ms)				
	Weight		Approximately 5 g					


<sup>1</sup> Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.


MO	MODEL					
5 А Туре	3 А Туре	Nominal voltage	Coil resistance (±10%)	Must operate voltage*1	Must release voltage* <sup>1</sup>	Nominal power
JY-( ) H, JY-( ) HE	JY-( ), JY-( ) W, JY-( )E	· · · · · · · · · · · · · · · · · · ·	(,	go	go	perrer
JY- 4.5 H ( )-K	JY- 4.5 ( )-K	4.5 VDC	100 Ω	3.1 VDC	0.23 VDC	200 mW
JY- 5 H ( )-K	JY- 5()-K	5 VDC	125 Ω	3.5 VDC	0.25 VDC	200 mW
JY- 6 H ( )-K	JY- 6()-K	6 VDC	180 Ω	4.2 VDC	0.3 VDC	200 mW
JY- 9H()-K	JY- 9()-K	9 VDC	405 Ω	6.3 VDC	0.45 VDC	200 mW
JY- 12 H ( )-K	JY- 12 ( )-K	12 VDC	720 Ω	8.4 VDC	0.6 VDC	200 mW
JY- 18 H ( )-K	JY- 18 ( )-K	18 VDC	1,620 Ω	12.6 VDC	0.9 VDC	200 mW
JY- 24 H ( )-K	JY- 24 ( )-K	24 VDC	2,880 Ω	16.8 VDC	1.2 VDC	200 mW
JY- 48 H ( )-K	JY- 48 ( )-K	48 VDC	6,400 Ω	32.6 VDC	2.4 VDC	360 mW
JY-101-K		23.5 VDC	2,760 Ω	15.5 VDC	1.18 VDC	200 mW
JY-105-K		12 VDC	720 Ω	8.4 VDC	0.6 VDC	200 mW
JY-107-K		5 VDC	125 Ω	3.5 VDC	0.25 VDC	200 mW

#### ■ COIL DATA CHART


Note:  $^{*1}$  Specified values are subject to pulse wave voltage. All values in the table are measured at 20°C.









Maximum Switching Power









# **JY SERIES**

#### ■ REFERENCE DATA

Initial 10 30 50 70 100 150

Operation (  $\times 10^3$ )

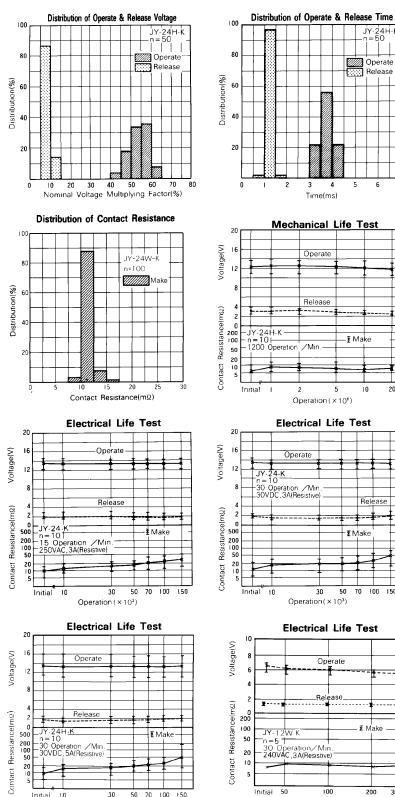

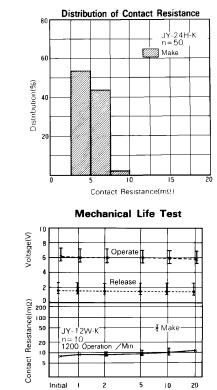

JY-24H-K n=50

Operate

Release

6

10

Release


100 150


200 300

Operation (  $\times 10^3$ )


20

Operation ( × 10<sup>6</sup>) **Electrical Life Test** 






# **JY SERIES**












#### Schematics (BOTTOM VIEW)

• PC board mounting hole layout (BOTTOM VIEW)




Unit: mm


(60

62

ф

## ■ SOCKET DIMENSIONS





16

#### ■ NOTES

- 1. Socket ordering code : JK-4N
- 2. Standard IC socket is not recommended. Please use socket "JK-4N".

Unit: mm


# **RoHS Compliance and Lead Free Relay Information** 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (http://www.fcai.fujitsu.com/pdf/LeadFreeLetter.pdf)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for FTRB3 and FTR-B4 series relays.
- Most signal and some power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 6 hazardous materials that are restricted by RoHS directive (lead, mercury, cadmium, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.

We will ship leaded relays as long as the leaded relay inventory exists.

# 2. Recommended Lead Free Solder Profile

• Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005) **Reflow Solder condtion** 

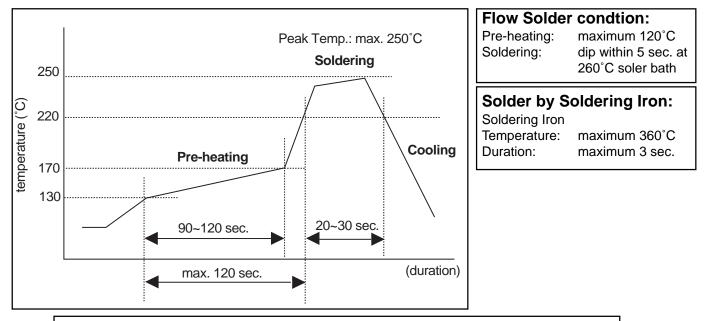

#### We highly recommend that you confirm your actual solder conditions

## 3. Moisture Sensitivity

• Moisture Sensitivity Level standard is not applicable to electromechanical realys.

## 4. Tin Whisker

 SnAgCu solder is known as low riskof tin whisker. No considerable length whisker was found by our in-house test.

# 5. Solid State Relays

• Each lead terminal will be changed from solder plating to Sn plating and Nickel plating. A layer of Nickel plating is between the terminal and the Sn plating to avoid whisker.

Fujitsu Components International Headquarter	Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com	Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fceu.fujitsu.com		
Offices	North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: marcom@fcai.fujitsu.com Web: www.fcai.fujitsu.com	Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #04-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com www.fcal.fujitsu.com		

© 2005 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 07/19/2005.