

SC&T

SMART CABLING & TRANSMISSION

● 廣受各大小工程公司採用

● 榮獲得多項歐美認證

CE FC RoHS


台灣製造



華輝
WECL

中港澳總代理

專業級影像傳輸及佈線系統產品

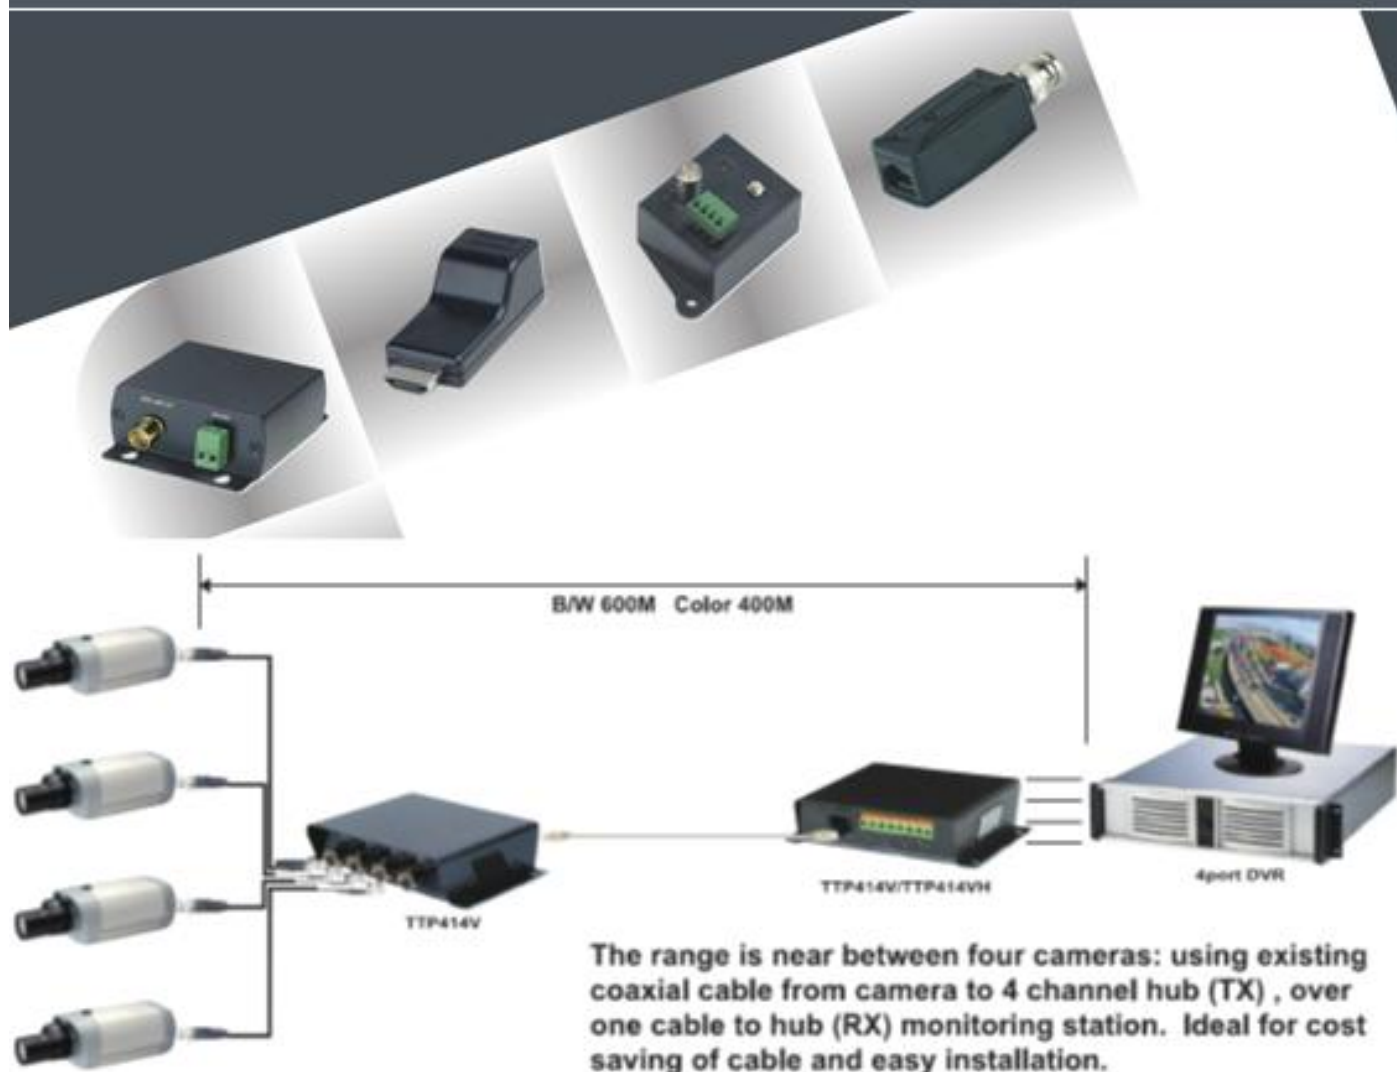

CE FC RoHS

RoHS

目錄 Index



內容 Content

頁 Page

About SC&T

2

關於 SC&T

華輝香港代理證書

Certificate of Authorization



Twisted Pair Transmission

4

雙絞線收發裝置



IP Cabling Transmission

12

網路數據收發裝置



Cat 5 VGA Transmission

14

使用 Cat5 雙絞線的 VGA 收發裝置



Video and Audio Transmission

18

視頻及音頻的收發裝置



Data Transmission

21

數據收發裝置



Surge Protection Devices

24

浪湧/雷擊保護器



Solution Provider for difference video interference

26

視頻干擾的解決方案



Power Center

28

電源供應/分配器

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

1

關於 SC&T

自 2002 年以來，新基科技股份有限公司 CCTV 佈線系統產品已處於國際領先的地位。我們設計，開發和生產的 CCTV 視頻傳輸及 IP 安防電纜傳輸產品包括有雙絞線傳輸，IP 電纜傳輸，使用五類雙絞線的 VGA 傳輸，數據傳輸，同軸電纜視頻分配器，放大器，電湧保護器，視頻干擾的解決方案，電源供應，及其他配件等。

2004 年，新基科技開始到設計和開發一系列使用在 VGA，USB，鍵盤鼠標，音頻及視頻的增值產品，令用家可以用第五類雙絞線代替原有線纜，增加效益。

新基科技的佈線解決方案的範圍廣泛，不僅包括傳統的模擬 CCTV 佈線系統，也有 IP/數字佈線系統。作為一種替代的解決方案，這些智能佈線系統令成本更低和更容易進行遠距離傳輸的安裝。

憑著強大的開發團隊，質量管理及精良的設備，令新基科技的產品能符合 CE, FCC, UL, C-TICK, WEEE, RoHS 等認證。

About SC&T

Smart Cabling & Transmission Corp. has been a leading professional manufacturer in the field of CCTV Security Cabling System products since 2002. We design, develop and manufacture a full range of CCTV & IP Security Cabling products on Twisted Pair Transmission, IP Cabling Transmission, CAT5 VGA Transmission, Data Transmission, Coaxial Cabling system for Video Distributor & Amplifier, Surge Protector, Solution Provider for Video Interference, Power Center, other accessories...etc.

In 2004, SC&T began to design and develop a value-added extender product on VGA, USB, Keyboard mouse, Audio, Video to be connected via cost-effective CAT5 cable instead of VGA, USB, Keyboard mouse, Component Video, HDMI, DVI cable.

SC&T broad range of cabling solution includes not only for traditional analog CCTV cabling but also for IP/Digital security cabling system. As an alternative solution to coax, fiber optic, these smart cabling system transmissions provide lower cost and easier installation for long-range transmission.

With strong R&D team, quality control system and well-equipped facilities, all products provided are of the highest quality and performance that comply with CE, FCC, UL, C-TICK, WEEE, RoHS.

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

2

Smart Cabling & Transmission Corp.

CERTIFICATE OF DISTRIBUTORSHIP

Smart Cabling & Transmission Corp is pleased to appoint

Welfare Electronic Component Ltd.

1/F., Cheong Lok Building, 199 Cheung Sha Wan Road,
Shamshuipo, Kln, Hong Kong

As a Smart Cabling Authorized Distributor in Hong Kong,
Macau, China.

Brand: **SC&T**

Smart Cabling & Transmission Corp.



International Sales & Marketing Manager

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-1010	TTP111VE - BNC male to terminal block - 安裝簡易·省時省錢 Fast, easy installation, saving time and money - 節省線材成本 Substantial savings on the cost of the cable itself. - 長距離傳送仍保持畫面質素 Superb quality on long range transmission. - 無源式收發距離最遠達 600 米(黑/白)或 300 米(彩色) Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	現貨 Available
27-60-9111	TTP111VEL –Mini Video Transceiver with Pigtail - 安裝簡易·省時省錢 Fast, easy installation, saving time and money. - 節省線材成本 Substantial savings on the cost of the cable itself. - 長距離傳送仍保持畫面質素 Superb quality on long range transmission. - 無源式收發距離最遠達 600 米(黑/白)或 300 米(彩色) Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	現貨 Available
27-60-1112	TTP111V - Video Transceiver BNC Male To RJ45 Female - 安裝簡易·省時省錢 Fast, easy installation, saving time and money. - 節省線材成本 Substantial savings on the cost of the cable itself. - 長距離傳送仍保持畫面質素 Superb quality on long range transmission. - 無源式收發距離最遠達 600 米(黑/白)或 300 米(彩色) Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	現貨 Available
27-60-4111	TTP111VT - Video Transceiver BNC Male To Terminal Block - 安裝簡易·省時省錢 Fast, easy installation, saving time and money - 節省線材成本 Substantial savings on the cost of the cable itself. - 長距離傳送仍保持畫面質素 Superb quality on long range transmission. - 無源式收發距離最遠達 600 米(黑/白)或 300 米(彩色) Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

4

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-1114	TTP111VTS - Video Transceiver built in Surge Protection - 收發距離最遠達 600 米(黑/白)或 400 米(彩色) Transmit a full motion monochrome video signal up to 600 meters, color video signal up to 400 meters. - 配合有源式收發器距離可達 1000 米 Distance Up to 1Km when used with an active receiver (TTA111VH, TTA111V,AV, TTA414VR, TPA008, TPA016) - 無需電源 Passive, No power required - 內置浪湧保護裝置 Built in surge protection	歡迎查詢 Please ask	現貨 Available
27-60-1113	TTP111VCT - Video Transceiver With 18cm Retractable Cord - 防水級別 IP65 Weather Proof - 適合使用於可轉動的攝像機 Perfect for camera with pan-tilt turning device	歡迎查詢 Please ask	現貨 Available
27-60-1117	TTP111VLH - Video Transceiver w/ extra interference rejection - 收發距離最遠達 600 米(黑/白)或 400 米(彩色) Transmit a full motion monochrome video signal up to 600 meters, color video signal up to 400 meters. - 防水級別 IP65 Weather Proof - 配合有源式收發器距離可達 1000 米 Distance Up to 1Km when used with an active receiver (TTA111AVR) - 無需電源 Passive, No power required.	歡迎查詢 Please ask	訂購 Booking
27-60-1116	TTP111VP - Video Transceiver BNC Male To RJ45 Female w/ Power Cord 配合 TTP111VPJ 使用 · 最遠距離達 50 米 Use with TTP111VPJ, transmit video & power over one CAT 5 cable. (range 50 meters)	歡迎查詢 Please ask	現貨 Available
27-60-0113	TTP111VP3 –Video & Power Transceiver for AC24V Camera (3 pairs) - 使用 3 對線收發電源 Video (one pair) and remote power (3pairs) transmission over one 4pairs CAT5 cable - 最遠距離達 300 米 Transmission range up to 300 meters (max.)	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

5

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-0131	TTP111VPC - Video & Power Transceiver for DC12V Camera - 內置 AC/DC (12V)轉換器, 提供最多 1000mA 電流 Built in AC to DC12V regulated power converter, 1000mA max. - 可選擇使用 2 對或 3 對線收發電源 Built in switch to set unit for "2 pair power through" or "3 pairs power through" mode - 最遠距離達 300 米 Transmission range up to 300 meters (max.)	歡迎查詢 Please ask	現貨 Available
27-60-1145	TTP111VPD-RJ45-K - Video, Power, Data Combiner DIY Kit - 同一條雙絞線可收發視頻·低壓電源·數據(RS232/485) Video, low voltage camera power, Data (RS422, 485) transmission over one standard CAT 5 cable - 無源式收發距離最遠達 600 米(黑/白)或 300 米(彩色) Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	訂購 Booking
27-60-1118	TTP111VPK - Video & Power Transceiver DIY KIT - 利用雙絞線傳電源·適合攝像機使用 Power send over UTP cable, application for low voltage power camera. - 安裝簡易·省時省錢 Fast, easy installation, saving time and money. - Substantial saving on the costs of the cable itself 節省線材成本	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改·恕不另行通知。 All specifications, price and availability subject to change without notice.

6

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-1110	TTP111AV – Audio & Video Transceiver 一條雙絞線可傳視頻及雙向立體聲音頻 Video and stereo audio (two ways) transmission over one CAT5 cable.	歡迎查詢 Please ask	現貨 Available
27-60-4142	TTP414V - 4 Channel Video Transceiver - 一條雙絞線可傳 4 組視頻信號 One CAT5 cable to send 4 video signal to instead of coaxial cable. - 安裝簡易，省時省錢 Fast, easy installation, saving time and money. - 節省線材成本 Substantial savings on the cost of the cable itself. - 長距離傳送仍保持畫面質素 Superb quality on long range transmission. - 無源式收發距離最遠達 600 米(黑/白)或 400 米(彩色). Passive Video Transceiver (no power required), transmission range color 300 meters, B/W 600 meters via CAT 5 UTP Cable.	歡迎查詢 Please ask	現貨 Available
27-60-4144	TTP414VD - 4 Channel Video Transceiver With Data - 內置 4 個無源式收發器 Four passive transceivers in one product - 其中一對線可選收發視頻或數據 Using 4 pairs CAT5 cable to transmit/receive 3 sets video signals plus 1 data signal or transmit/receive 4 sets video signals only.	歡迎查詢 Please ask	現貨 Available
27-60-0414	TTP414VH - 4 Channel Video Transceiver w/ Extra Interference Rejection - 內置 4 個無源式收發器 Four passive transceivers in one product - 內置平衡式裝置可阻擋外來干擾，例如其他的數據信號，視頻信號，接近的電源，電話，螢光燈管，變壓器等 Built in a highly balanced mode of video transmission, which is immune to interference, and other sources of noise: Data signals, other video signals, nearby power, ringing telephones, fluorescent lights, transformers, etc.	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

7

產品編號 Code 產品型號及描述 Model No. and Description 價目 Price (HK\$) 存倉 Stocks

27-60-0444

TTP444VPD - 4 Channel Video, Power, Data Transceiver

歡迎查詢


訂購

Please ask

Booking



- 同一條雙絞線可收發視頻 · 低壓電源 · 數據(RS232/485) Video, camera power, Data (RS422, 485) transmission over one standard CAT 5 cable.
- 內置 PTC 保險絲防止短路損害 Built in PTC fuse for short protection.

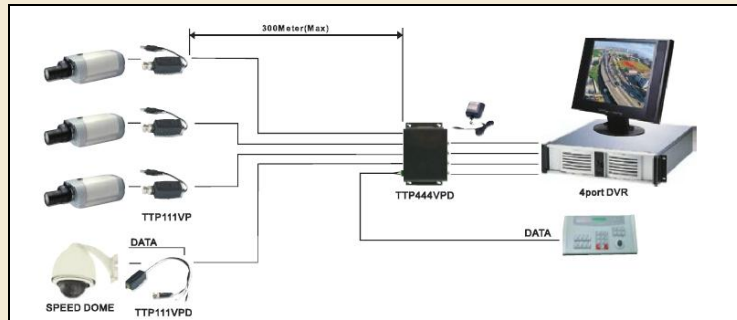

27-60-0111

TTA111AV - Active Video & Audio & Data Twisted Pair Transmission

歡迎查詢

現貨

Please ask

Available



- 同一條雙絞線可收發視頻 · 音頻 · 數據(RS232/485)Transmit video, audio and data signal (RS422, RS485).
- 輸送端可調增益幅度(3 段)Three position range switch for gain select on transmitter.
- 五段式調整可因應不同距離需要傳送最佳影像效果.Five position distance range switch on Receiver, brightness adjustment, two video output.
- 內建防瞬間突波襲擊裝置及特殊防干擾裝置 Built in transient protection and ground lifting.
- 有源式收發距離最遠達 2400 米(黑/白)或 1500 米(彩色)Active Video Transceiver (power required), transmission range color 1500 meters, B/W 2400 meters via CAT5 UTP cable.

27-60-5112

TTA111VR - Active Video Twisted Receiver (27-60-5112)

歡迎查詢

現貨

TTA111VT - Active Video Twisted Transmitter (27-60-5111)

Please ask

Available



27-60-5111



- 輸送端可調增益幅度(3 段) Three position range switch for gain select on transmitter.
- 五段式調整可因應不同距離需要傳送最佳影像效果 Five position distance range switch on Receiver, brightness adjustment, two video output.
- 內建防瞬間突波襲擊裝置及特殊防干擾裝置 Built in transient protection and ground lifting.
- 有源式收發距離最遠達 2400 米(黑/白)或 1500 米(彩色)Active Video Transceiver (power required), transmission range color 1500 meters, B/W 2400 meters via CAT5 UTP cable.

產品規格價錢及其供應如有更改 · 恕不另行通知 · All specifications, price and availability subject to change without notice.

8

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-4145	TTA414VR - 4 Channel Active Receiver - 內置 4 個有源式收發器 Built in 4 port active receivers. - 功能與 TTA111VR 相同 Others identical to TTA111VR. - 內置平衡式裝置可阻擋外來干擾 Built in a highly balanced mode of video transmission for extra interference immunity. - 有源式收發距離最遠達 2400 米(黑/白)或 1500 米(彩色) Active Video Transceiver (power required), transmission range color 1500 meters, B/W 2400 meters via CAT5 UTP cable.	歡迎查詢 Please ask	現貨 Available
27-60-1111	TTA111VGA - VGA Extender - CAT5 VGA Transmitter - 接收端可調對比度及光暗度 Built in contrast, brightness adjustment at Receiver. - 支援最大解像度 1600x1200 @85Hz Supports up to 1600x1200 @85Hz. - 最遠距離達 300 米 Long range transmission up to 300 meters (Max.)	歡迎查詢 Please ask	現貨 Available
27-60-1016	TPP016 - 16 Port Passive Transceiver Hub In 1U Rack Mounting Panel - 配合有源式收發器使用最遠距離達 1000 米 As a rack mounting passive transmitter hub, use with active receiver at distance up to 1000 meters. - 無需電源 Passive, no power required. - 內置平衡式裝置可阻擋外來干擾 Built in a highly balanced mode of video transmission for extra interference immunity.	歡迎查詢 Please ask	現貨 Available
27-60-0163	TPP016VPD - CCTV hub - 一條 Cat.5 雙絞線可傳視頻、電源及數據、最遠達 300 米 Integrate and send video and power, data over a single 4 pairs CAT5 cable up to 300 meters. - 按距離可選擇電源收發的線數 Built in switch at each port to set unit for "2 pair power + 1 pair data" mode or "3 pairs power" mode. Power cameras via 2 or 3 pairs UTP cable for variety distances (please refer to below power distance chart). - AC24V /8A 電源、每個埠可輸出 1.1A 電流供攝像機使用、最大共 8A 電流 AC24V /8A power, each port output current up to 1.1A for camera, max up to 8A - 內建斷路裝置防止電流過大 Built in "no fuse breaker" to avoid current overload. - 內建 PTC、對每個埠提供短路保護及自動重啟功能 Built in PTC (positive temperature coefficient) for short protection and auto rework on each port. - 內置電湧保護裝置 Built in surge protection.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-60-0012	TRN012 - 3U 19" Rack Mounting Cabinet ● 標準 19 吋 3U 機櫃尺寸，內置 3A 開關電源 Standard 19" 3U rack mounting cabinet built in 3A switching power supply. ● 15 個插卡位置，可選擇使用 TRP111AV, TRP414VH 或 TRA111VH 插卡 15 insert lots for TRP111AV, TRP414VH, TRA111VH receiver rack card. ● 無需使用冷卻風扇 No cooling fans required ● 接地接口供監察器材使用 Ground connecting for protection monitoring equipment. ● 適宜於配合大型保安監控系統或視頻音頻分配器使用 Ideal for large security monitoring stations or video (audio) distributions hubs.	歡迎查詢 Please ask	訂購 Booking
27-60-3414	TRP414VH - 19" Rack Card 4 Channel Passive Receiver ● 一個 RJ45 連接埠及 4 個 BNC 視頻輸出埠 1 RJ45 input and 4 video BNC outputs. ● 內置平衡式裝置可阻擋外來干擾 Built in a highly balanced mode of video transmission for extra interference immunity, perfect work with DVR to immunity DVR interference. ● 配合 TRN012，最多可插 15 張 TRP414VH 卡，最多可支援 60 路無源式收發視頻。 Use with TRN012, to insert up to 15 pieces TRP414VH for 60 channel passive video transmission. ● 無需電源 Passive, no power need. ● 收發距離最遠達 600 米(黑/白)或 400 米(彩色) Transmission distance: 600M(B/W), 400M(COLOR)	歡迎查詢 Please ask	訂購 Booking
27-60-3111	TRA111VH - 19" Rack Card One Channel Active Receiver ● 內置平衡式裝置可阻擋外來干擾 Built in a highly balanced mode of video transmission for extra interference immunity. ● 高、中、低頻都有顏色增益和光暗對比調教 HF, MF, LF compensation for color gain and adjustable brightness & contract for cleaner, sharper looking picture. ● 內置電湧保護裝置 Built in Surge Protection. ● 長距離傳送仍可維持優質畫面 Perfect to maintain good quality picture for long-range transmission with DVR. ● 配合 TRN012，最多可插 15 張 TRA111VH 卡，最多可支援 15 路有源式收發視頻。 Use with TRN012, to insert up to 15 pieces TRA111VH for 15 channel active video receive.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

10

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-4146	TDP414VP - 4 x RJ45 Female to 1 x RJ45 Female CAT 5 Cable Hub With Power ● 內置 DC 電源接口 Built in terminal block for DC in. ● 內置 PTC 保險絲作短路保護 Built in PTC (positive temperature coefficient) fuse for short protection ● 配合 TTP111VP 收發電源最遠可達 50 米 Use with TTP111VP to transmit power for camera use from remote site 50 meters. ● 附 1.2A 穩壓電源供應器 Package comes with 1.2A regulated power adapter.	歡迎查詢 Please ask	現貨 Available
27-60-2016	TPA016 - 16 Port Active Receiver Hub In 1U Rack Mounting Panel ● 內含 16 路 TTA111VR 有源式接收器 Built in 16 port TTA111VR active receivers in 1U 19" rack mounting panel. ● 內置平衡式裝置可阻擋外來干擾 Built in a highly balanced mode of video transmission for extra interference immunity. ● 內建防瞬間突波襲擊裝置及特殊防干擾裝置 Built in transient protection and ground lifting.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-0001	IP01 - IP Extender over Coax ● 可利用同軸線傳送網絡攝像機信號及資料 Send IP camera signal over existing coaxial cable. ● 無源式 · 無需電源 Passive, no power required. ● 優秀的 802.3 10BaseT NEXT 規格 · 令接收端免受信號干擾 Exceeds 802.3 10BaseT NEXT specification, isolating the receiver from the transmitted signal. ● 最遠收發距離達 200 米 Transmission up to 200 meters (Max).	歡迎查詢 Please ask	現貨 Available
27-60-0002	IP02 - Active IP extender over Coax ● 可利用同軸線傳送網絡攝像機或任何 IP 網絡器材的資料 Send and extend IP camera signal or any TCP/IP devices over existing coaxial cable. ● 有源式收發 Active type, including transmitter and receiver. ● Plug and play for easy connection 即插即用 ● 最遠收發距離達 1800 米 Long range transmission up to 1800 meters (Max.) ● 數據速度參考 :Data Rate reference ■ IP02 use RG59/U cable: ◆ 300M 50Mbps ◆ 600M 45Mbps ◆ 1000M 40Mbps ◆ 1800M 20Mbps	歡迎查詢 Please ask	訂購 Booking
27-60-1002	IP02P - Active IP extender over Coax ● 可利用同軸線傳送網絡攝像機或任何 IP 網絡器材(包括支援 PoE) 的資料 Send and extend IP / POE camera signal or any TCP/IP devices over existing coaxial cable. ● 最遠收發距離達 250 米 Maximum range up to 250 meters.	歡迎查詢 Please ask	訂購 Booking
27-60-0003	IP03 - Active IP Extender over CAT5 ● 與 IP02 相同功能 · 但使用 Cat.5 雙絞線 Identical to IP02, but over CAT5 cable instead of coaxial cable. ● 最遠收發距離達 250 米 Long range transmission up to 1200 meters (Max.) ● 數據速度參考: Data Rate reference ■ IP03 use CAT5e UTP cable: ◆ 300M 50Mbps ◆ 600M 40Mbps ◆ 1200M 20Mbps	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改 · 恕不另行通知。 All specifications, price and availability subject to change without notice.

12

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-0004	IP04 - POE/LAN Repeater - 同時把電源及數據傳送距離增加超過 100 米 Extend of both power and data to beyond 100 meters. - 無需電源 Passive, no power need. - 符合 IEEE802.3af 的規格 Compatible with universal IEEE 802.3af POE standard.	歡迎查詢 Please ask	現貨 Available
27-60-0050	IP05 - POE Kit For DC5V/DC12V IP Camera - 內含 PoE injector 及 splitter Include IP05I POE injector and IP05S POE splitter. - 符合 IEEE802.3af 的規格 (12.95W) Compatible IEEE 802.3af (12.95W) POE standard, PSE/PD. 2 組電流/電壓選擇, 配合不同器材 Adjustable two different output voltage options (5V/2A, 12V/1A) to fit various devices. - PoE 最大輸出達 12.95 瓦 Supports POE power up to 12.95 Watts for POE port. - 支援千兆以太網(GbE) Support 10/100/1000 BASE-T transmission rate. - 最遠距離達 100 米 Distance up to 100 meters.	歡迎查詢 Please ask	現貨 Available
27-60-0061	IP06I Hi Power PoE Injector (27-60-0061)	歡迎查詢 Please ask	現貨 Available
27-60-0062	IP06S Hi Power PoE Splitter (27-60-0062) - 符合 IEEE802.3at 千兆以太網傳送電源的規格 Complies with IEEE 802.3at Gigabit high power over Ethernet pre-standard, PSE/PD. - 能提供高達 54V 直流電 IP06I provides DC 54V power over RJ-45 Ethernet cable to devices with Ethernet port. - 支援由 54V 直流電轉為 5V/12V 直流電 IP06S splits the 54V DC power over RJ-45 Ethernet cable into DC 5V/12V output. 2 組電流/電壓選擇, 配合不同器材 Adjustable two different output voltage options (5V/4.5A, 12V/ 2A) to fit various devices. - 最大輸出達 25 瓦 Supports POE power up to 25 Watts for PoE port. PoE - 支援千兆以太網(GbE) Support 10/100/1000 BASE-T transmission rate. - 兼容與各式符合 IEEE802.3at 規格的器材 IEEE 802.3at devices compatible. - 最遠距離達 100 米 Distance up to 100 meters.	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

13

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-39-5001	VKM01 - VGA Keyboard Mouse CAT5 Extender- PS/2 Interface ● 使用 2 條 Cat. 5 雙絞線把 VGA 視頻, 鍵盤和滑鼠信號延長 Extend VGA, keyboard & mouse over 2 CAT5 UTP cable to instead of VGA cable and keyboard mouse cable. ● 套裝含傳送及接收裝置 Including local and remote units. ● 最遠距離達 100 米 Up to 100 meters via standard 4 pairs CAT5 UTP or STP cable instead of VGA cable. ● 支援 VGA 最大解像度達 1280x1024 Supports up to 1280x1024 pixels. ● 無源式器件, 不支援 VGA DDC Passive device, not support VGA DDC protocol. ● 適用於課室, 演講廳等 Perfect for classrooms, lecture halls, tradeshow, video information displays...etc.	歡迎查詢 Please ask	現貨 Available
27-60-3332	TTP111VGA – Passive VGA CAT5 Extender ● 無需電源 Passive, no power need. ● 以 Cat.5 雙絞線代替傳統 VGA 線, 最遠可達 135 米 Up to 135 meters via standard 4 pairs CAT 5 STP cable instead of VGA cable. ● 支援 VGA 最大解像度達 1280x1024 Supports up to 1,280 x 1,024 pixels. ● 可用於桌面電腦, 筆記本電腦, 投影機, plasma 顯示屏等。 Work with desktop PCs, laptops, LCD projectors, plasma displays. ● 適用於課室, 演講廳等。Perfect for classrooms, lecture halls, tradeshow, video information displays...etc.	歡迎查詢 Please ask	現貨 Available
27-60-1111	TTA111VGA –Active Long Range VGA Extender ● 無需電源 Passive, no power need. ● 以 Cat.5 雙絞線代替傳統 VGA 線, 最遠可達 135 米 Up to 135 meters via standard 4 pairs CAT 5 STP cable instead of VGA cable. ● 支援 VGA 最大解像度達 1280x1024 Supports up to 1,280 x 1,024 pixels. ● 可用於桌面電腦, 筆記本電腦, 投影機, plasma 顯示屏等。 Work with desktop PCs, laptops, LCD projectors, plasma displays. ● 適用於課室, 演講廳等。Perfect for classrooms, lecture halls, tradeshow, video information displays...etc.	歡迎查詢 Please ask	現貨 Available

產品規格價錢及其供應如有更改, 恕不另行通知。 All specifications, price and availability subject to change without notice.

14

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-0102	VD102 – CAT5 VGA 1 Input to 2 Outputs Distributor ● 內含 VD102-T 傳送器和 TTA111VGA-R 接收器 Each set includes one piece VD102-T transmitter and one piece TTA111VGA-R receiver. ● 傳送器有一個本機使用的環路輸出·加一個 Cat.5 RJ45 輸出 Dual output: 1 VGA loop output for local, plus 1 CAT5 RJ45 output for remote side. ● 最遠可達 300 米 Long range transmission up to 300 meters (Max.) ● 接收器可調對比和光暗度 Built in contrast, brightness adjustment at Receiver. ● 支援 VGA 最大解像度達 1600x1200@85Hz Supports up to 1600x1200 @85Hz.	歡迎查詢 Please ask	現貨 Available
27-60-0105	VD105 – CAT5 VGA 1 Input to 5 Outputs Distributor ● 內含 VD105-T 傳送器和 TTA111VGA-R 接收器 Each set including one piece VD105-T transmitter and one piece TTA111VGA-R receiver. ● 傳送器有一個本機使用的環路輸出·加四個 Cat.5 RJ45 輸出 Dual output: 1 VGA loop output for local, plus 4 x CAT5 RJ45 output for remote side. ● 每個 VGA 輸出需連接一個 TTA111VGA-R 接收器(需另購) Each VGA display equipment request one TTA111VGA-R receiver at remote side (Order separately). ● 最遠可達 300 米 Long range transmission up to 300 meters (Max.) ● 接收器可調對比和光暗度 Built in contrast, brightness adjustment at Receiver. ● 支援 VGA 最大解像度達 1600x1200@85Hz Supports up to 1600x1200 @85Hz.	歡迎查詢 Please ask	訂購 Booking
27-60-1025	TTA111VGA-R - CAT5 Long Range VGA Receiver ● 可配合 TTA111VT, VD102-T 及 VD105-T 使用 Work with TTA111VT, VD102-T, VD105-T VGA transmitter ● 接收器可調對比和光暗度 Built in contrast, brightness adjustment at Receiver. ● 支援 VGA 最大解像度達 1600x1200@85Hz Supports up to 1600x1200 @85Hz. ● 最遠可達 300 米 Long range transmission up to 300 meters (Max.) ● 適用於課室·演講廳等 Perfect for classrooms, lecture halls, tradeshow, video information displays...etc.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改·恕不另行通知。 All specifications, price and availability subject to change without notice.

15

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-60-0021	VE02ALR - VGA with Stereo Audio CAT5 Receiver ● 可配合 VE02ALT 使用 Work with VE02ALT, VE02ALR as receiver for extra remote VGA display equipment. ● 可與另一台 VE02ALR 串連使用，支援多重顯示，最遠可達 300 米 It could be daisy chained for another VE02ALR to extended working range over 300 meters and multiple displays. ● 內置均衡器及增益調節 Built in equalization, gain adjustment. ● 支援 VGA 最大解像度達 1600x1200@85Hz Supports up to 1600x1200 @85Hz.	歡迎查詢 Please ask	訂購 Booking
27-60-0024	VE02DALS - VGA & Stereo/Digital Audio CAT5 Receiver ● Work with CAT5 VGA transmitter as a high quality receiver. 可與以下型號配搭使用：TTA111VGA-T, VD102T, VD105T, VE02ALT, VE05ALT ● Built in RGB skew adjustment for the optimum video performance under long cable run. 內置 RGB skew 調整，可提升長距離傳送後的視頻表現 ● 可與另一台 VE02DALS 串連使用，支援多重顯示，最遠可達 300 米 It could be daisy chained for another VE02DALS to extended working range over 300 meters and multiple displays. ● 內置模擬音頻，和數碼音頻輸出(同軸/光纖) Built in analog audio, digital audio output (coaxial, optical) ● Built in equalization, gain adjustment. 內置均衡器及增益調節 ● Supports up to 1600x1200 @85Hz. 支援 VGA 最大解像度達 1600x1200@85Hz ● Support various digital output format 支援以下數碼音頻輸出規格: LPCM , Dolby Digital (AC3) and DTS	歡迎查詢 Please ask	訂購 Booking
27-60-0025	VE05AL VGA+Stereo Audio CAT5 Distribution Amplifier ● Each set including one piece VE05ALT transmitter and one piece VE02ALR receiver 內含 1 台 VE05ALT 及 1 台 VE02ALR ● Support analog stereo audio 支持立體聲音頻 ● Dual output: 1 VGA loop output for local, plus 4 x CAT5 RJ45 output for remote side. 雙輸出：1 個 VGA 環路輸出供本機使用，另加 4 個 RJ45 遠端輸出 ● Built in equalization, gain adjustment, chainable CAT5 output at remote unit. 內置均衡器，增益調節及作串連使用的 RJ45 接口 ● Remote unit could be daisy chained to another VE02ALR receiver to extended working range over 300 meters and multiple displays 可與另一台 VE02ALR 串連使用，支援多重顯示，最遠可達 300 米	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

16

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
87-30-0010	AD001H - Hi Resolution Video to VGA Converter ● 含 BNC 環路輸出 With BNC loop out ● 雙輸出 Dual output: VGA / BNC ● 支援 NTSC 和 PAL 視頻規格 Support NTSC, PAL video system. ● 螢幕功能顯示：對比度，光暗度，顏色，色彩，功能，解像度 On screen display function: Contrast, Brightness, Color, Tint, Features, Resolution. ● 內置靜電保護 Built in ESD protection. ● 內置自動視頻增益調節 Built in video auto gain control for good quality picture.	歡迎查詢 Please ask	現貨 Available
87-30-1001	VC01 - VGA to Video Converter ● 支援視頻規格 Video standards: NTSC/NTSC-EIAJ/PAL/PAL-M/PAL-N/SECAM. ● Resolutions support: 640 x 480 (up to 85 Hz), 800 x 600 (up to 85 Hz) and 1024 x 768 (up to 75 Hz). ● 雙輸出 Dual output : VGA / BNC ● 影像控制功能：水平/垂直尺寸，光暗度，對比度，色調，飽和度，銳利度，螢幕顯示的底色等。 Image controls: Horizontal and vertical size, brightness, contrast, hue, saturation, sharpness and on screen display background.	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
28-20-1101	AA001 - In Line Audio Pickup Box - 可獨立操作，無需其他器材 Audio pick up works individually without any other equipment. - 可需要時附在攝像機上作錄音用途 Add-on mini audio box for all Camera which need audio function - 高靈敏度麥克風及 DC12V 穩壓電源供應器 High sensitive microphone and DC12V power regulator built-in box.	歡迎查詢 Please ask	現貨 Available
28-20-1102	AA002 - Audio pick up Box - 可需要時附在攝像機上作錄音用途 Add-on mini audio box for all cameras that require an audio function. - 高靈敏度麥克風連 45cm 電源/音頻線 High sensitivity microphone (-65dB) with 45cm power/audio cable. - DC12V 操作 DC12V power operation	歡迎查詢 Please ask	現貨 Available
27-60-0011	TTP111A - Audio Transceiver - 最遠傳送距離達 1800 米 Used in pairs via CAT5 UTP cable to send Audio signal up to 1.8KM. - 頻率響應範圍：20Hz-20kHz 20Hz to 20kHz Bandwidth. 75Ω / 120Ω 線材都適用 Available for 75Ω-120Ω cable.	歡迎查詢 Please ask	現貨 Available
27-60-1110	TTP111AV - Audio & Video Transceiver 雙向立體聲及視頻收發 Two ways Audio and one Video over one CAT5 cable.	歡迎查詢 Please ask	現貨 Available
27-60-0212	TTP212AV - Dual Audio & Video Transceiver - 立體聲及雙視頻收發 Dual video and stereo audio transmission over one CAT5 cable. - 彩色視頻最遠距離達 300 米 Send color video up to 300 meters via CAT5 UTP cable. - 無需電源 Passive, no power required. - 最適合對講機(視頻)應用 Perfect for intercom application.	歡迎查詢 Please ask	現貨 Available
27-28-0102	CD102A - 1 Input 2 Output Video Distributor Amplifier - 信號增益，可放大至 10dB 及高頻增益補償 10dB video gain compensation amplification and HF compensation. - 可調的銳利度和亮度 Sharpness and Brightness adjustment, perfect to work with DVR. - 放大後有效收發距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable).	歡迎查詢 Please ask	現貨 Available

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

18

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-28-0104	CD104 - 1 Input 4 Output Video Distributor 1 組 BNC 影像輸入 4 組 BNC 影像輸出 1 video input to 4 video output.	歡迎查詢 Please ask	現貨 Available
27-28-0108	CD108 - 1 Input 8 Output Video Distributor 1 組 BNC 影像輸入 8 組 BNC 影像輸出 1 video input to 8 video output.	歡迎查詢 Please ask	現貨 Available
27-28-0408	CD408A - 4 Input 8 Output Video Distribution Amplifier - 頻寬範圍大，信號增益放大 Wide bandwidth, video gain compensation amplification. - 高頻增益補償 HF compensation. - 可調影像增益 10dB adjustable image gain. - 可調光暗度和銳利度 Sharpness and Brightness adjustment. - 有效傳送距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable)	歡迎查詢 Please ask	現貨 Available
27-28-0116	CD116 - 1 Input 16 Output Video Distributor 1 組 BNC 影像輸入 16 組 BNC 影像輸出 1 video input to 16 video output.	歡迎查詢 Please ask	訂購 Booking
27-28-0816	CD816 - 8 Input 16 Output Video Distributor 8 組 BNC 影像輸入 16 組 BNC 影像輸出 8 video input to 16 video output. - 自動增益控制，令信號保持標準視頻規格(1Vp-p) Automatic gain control (± 6dB range), normalizes output signals to standard video level 1Vp-p. - 每路獨立藍色 LED 顯示信號狀態 Blue LED: video signal on/off detection at each channel. - 內置噪聲過濾 Built in out-of-band noise filter. - 雙電源 Dual Power: DC12V /AC24V - 內附電源供應器 Power supply included.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

19

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-28-8160	CD816A - 8 Input 16 Output Video Distribution Amplifier  8 組 BNC 影像輸入 16 組 BNC 影像輸出 Video Input Channel: 8, Video Output Channel: 16 - 頻寬範圍大 · 信號增益放大 Wide bandwidth, video gain compensation amplification. - 高頻補償 HF compensation. 10dB 可調影像增益 10dB adjustable image gain. - 可調銳利度和光暗度 Sharpness and Brightness adjustment. - 有效傳送距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable)	歡迎查詢 Please ask	現貨 Available
27-28-1632	CD1632A - 16 Input 32 Output Video Distribution Amplifier  - 頻寬範圍大 · 信號增益放大 Wide bandwidth, video gain compensation amplification. - 高頻補償 HF compensation. 10dB 可調影像增益 10dB adjustable image gain. - 可調銳利度和光暗度 Sharpness and Brightness adjustment. - 有效傳送距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable)	歡迎查詢 Please ask	現貨 Available
27-28-1664	CD1664 - 16 Input 64 Output Video Distributor  16 組 BNC 影像輸入 64 組 BNC 影像輸出 16 video input to 64 video output. - 內置散熱風扇 Built in fan for stable working temperature.	歡迎查詢 Please ask	訂購 Booking
27-28-0101	CA101 - 1 Input 1 Output Video Amplifier  - 頻寬範圍大 · 信號增益放大 Wide bandwidth, video gain compensation amplification. - 高頻補償 HF compensation. 10dB 可調影像增益 10dB adjustable image gain. - 可調銳利度和光暗度 Sharpness and Brightness adjustment. - 有效傳送距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable)	歡迎查詢 Please ask	現貨 Available
27-28-0404	CA404 - 4 Input 4 Output Video Amplifier  - 頻寬範圍大 · 信號增益放大 Wide bandwidth, video gain compensation amplification - 高頻補償 HF compensation. 10dB 可調影像增益 10dB adjustable image gain. - 可調銳利度和光暗度 Sharpness and Brightness adjustment. - 有效傳送距離可達 1000 米(RG59) Transmission range: 1000 meters (RG59 coaxial cable)	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 **Special offer for members and projects, please ask**

產品規格價錢及其供應如有更改 · 恕不另行通知。 All specifications, price and availability subject to change without notice.

20

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-39-1001	RS001 - RS232 to RS485 converter ● 無需電源 Non power operation. ● 自動速度調整 (1200 米之內) Auto switching baud rate, speed up to 115,200 baud over a distance 1200 meters	歡迎查詢 Please ask	現貨 Available
27-39-1002	RS002I - RS232 to RS485/RS422 converter with isolation ● 自動調節速度 Auto Baud Rate Sensing. ● 最高速度達 115.2kbps Supports transfer speeds of up to 115.2Kbps. ● 距離最遠達 1200 米(100kbps 以下) Extends up to 1200 meters (under 100Kbps). ● LED 顯示電源及信號狀態 LEDs indications for power and signal status monitoring. ● 電流過大保護 Over current protection when 2 signals are shortened together at the RS422/485 end ● 浪湧保護高達 16kV Surge Protection 16KV ESD. ● 內置 3kV 隔離保護 Built in 3KV isolation protection.	歡迎查詢 Please ask	現貨 Available
27-39-0003	RS003I - USB to RS485 converter with isolation ● 無需電源 Non power operation. ● 自動調節速度 · 最高速度達 115.2kbps · 距離最遠達 1200 米 Auto switching baud rate, speed up to 115,200 baud over a distance 1200 meters ● USB2.0 規格 USB 2.0 Compliant ● 由電腦供電 Powered by PC ● 連接時無需重啟電腦 Connect/Disconnect Without Reboot ● 兼容於 Compatible with: Windows 98, ME, XP & 2000, MAC OS 8.6 to 9.2 ● 附驅動軟件 Software Drivers Included ● 內置 3kV 隔離保護 Built in 3KV isolation protection.	歡迎查詢 Please ask	現貨 Available
27-39-0232	RS232U - USB to RS232 converter ● 無需電源 Non power operation. ● 支援 RS232 最高速度達 921.6kbps Support RS232 transfer rate up to 921.6Kbps. ● USB2.0 規格 USB 2.0 Compliant. ● 由電腦供電 Powered by PC. ● 連接時無需重啟電腦 Connect/Disconnect Without Reboot. ● 兼容於 Compatible to: Windows 98, ME, 2000, XP & 2003 , VISTA. MAC OS 8.6 to 9.2	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

21

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-39-0011	RS485 - Data Repeater - 每個中繼器之間距離可達 1200 米 Repeater from RS485 data signal to RS485 up to 1200 meters. - DC 電源插口 Power input from DC jack. - 自動調節速度 · 最高速度達 115.2kbps Auto detected Baud rate maximum up to 115.2 Kbps. - 內置 2.5kV 隔離保護 Built in 2.5KV isolation protection. - 浪湧保護 Surge protection.	歡迎查詢 Please ask	訂購 Booking
27-39-1004	RS004 - RS485 Distributor 1 input 4 Output - 一組 RS232/485 輸入 · 4 組 RS485 輸出 Input option: 1 x RS232 or 1x RS485 Output: 4 x RS485. - 傳送距離達 1200 米 Max. connection range up to 1200 meters by Twisted Pair cable. - 可與其他型號堆疊使用 Ability to cascade connection to other units : RS004/RS008/RS016.	歡迎查詢 Please ask	訂購 Booking
27-39-1008	RS008 - RS485 Distributor 1 Input 8 Output In 1U Rack Mounting Panel - 一組 RS232/485 輸入 · 8 組 RS485 輸出 Input option: 1 x RS232 or 1x RS485 Output: 8 x RS485. - 傳送距離達 1200 米 Max. connection range up to 1200 meters by Twisted Pair cable. - 可與其他型號堆疊使用 Ability to cascade connection to other units : RS008/RS016.	歡迎查詢 Please ask	訂購 Booking
27-39-1016	RS016 - RS485 Distributor 1 Input 16 Output In 1U Rack Mounting Panel - 一組 RS232/485 輸入 · 16 組 RS485 輸出 Input option: 1 x RS232 or 1x RS485 Output: 16 x RS485. - 傳送距離達 1200 米 Max. connection range up to 1200 meters by Twisted Pair cable. - 可與其他型號堆疊使用 Ability to cascade connection to other units: RS008/RS016.	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-39-1003	KM03- Keyboard Mouse CAT5 Extender – USB Interface ● 套裝包含傳送端和接收端 Including local and remote unit. ● 遠端接收需外接電源 External power required at remote side. ● 傳送距離達 300 米 Transmission range up to 300 meters. ● 內置 LED 狀態燈號顯示 Built in LED indication. ● 30 米以下無需使用外接電源 No external power adapter required under 30 meters.	歡迎查詢 Please ask	訂購 Booking
27-27-0011	PCR011N - SMART PTZ Receiver ● 內部支援 PELCO D 通訊協定 Built in PELCO D protocol ● IP65 防塵防水級別外殼 IP65 Weatherproof case ● 雲台控制 PAN & TILT control ● 鏡頭縮放及對焦控制 Lens control: zoom, focus ● 1 Auxiliary Relay provide for any desired functions: alarm, wash/wipers, lighting ● 簡易位址編碼設定 (00-99) Easy addressed code setting. (00-99) ● 能支援 AC110V/220V/24V 的雲台，及 DC6/12V 的縮放鏡頭 Allows the pan tilt power AC110V/220V/24V, zoom lens power DC12 or 6V (2A-Max.) ● 能支援控制較重型雲台(最大 16A 電流) Support heavy duty Pan tilt working power up to 16 Amp (current). ● 防浪湧保護 Built in surge protection ● 支援各式鏡頭 Support all pan, tilt, zoom lens	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

23

- Performs a different function from grounding requirements.
- Protects equipment from high voltage surges from nearby lightning strikes.
- Two stage protection: under 1 ns – 90V, over 10ns-12V.
- Wide range of applications: CCTV/CATV system, antenna of television, FM receivers, video camera, monitors, multiplexers & quad processor, VCR, etc.

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-61-0001	SP001 - Coaxial Video Surge Protector BNC Connector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 浪湧保護時間 Surge Protection Attack Time: 1 ns ● 最大保護電壓 Maximum Surge Voltage: 4kV ● 最多保護次數: 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available
27-61-9001	SP001P - Power Surge Protector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 最大支援電源輸入 Max power input : AC40V(MAX), DC56V(MAX)	歡迎查詢 Please ask	現貨 Available
27-61-7001	SP001VPD - Video, Power, Data Surge Protector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 浪湧保護時間 Surge Protection Attack Time : 1 ns ● 最大保護電壓 Maximum Surge Voltage: 4kV ● 最多保護次數: 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available
27-61-0002	SP002 - Video Surge Protector - F Connector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 浪湧保護時間 Surge Protection Attack Time : 1 ns ● 最大保護電壓 Maximum Surge Voltage: 4kV ● 最多保護次數: 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available
27-61-0003	SP003 - UTP Video Surge Protector RJ45 Connector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 浪湧保護時間 Surge Protection Attack Time : 1 ns ● 最大保護電壓 Maximum Surge Voltage: 4kV ● 最多保護次數: 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available
27-61-0004	SP004 - UTP Data Surge protection Device Terminal Connector ● 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. ● 浪湧保護時間 Surge Protection Attack Time: 1 ns ● 最大保護電壓 Maximum Surge Voltage: 4kV ● 最多保護次數: 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

24

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-61-0005	SP005 - Video and Data Surge Protection Device - 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. - 浪湧保護時間 Surge Protection Attack Time : 1 ns - 最大保護電壓 Maximum Surge Voltage: 4kV - 最多保護次數 : 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	訂購 Booking
27-61-0006	SP006 - Network Surge Protection Device - 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. - 浪湧保護時間 Surge Protection Attack Time : 1 ns - 最大保護電壓 Maximum Surge Voltage: 4kV - 最多保護次數 : 300 次(100A) Surge Life: 300 surges of 100A 4 對雙絞線都有保護 Four Pairs protection	歡迎查詢 Please ask	現貨 Available
27-61-1006	SP006P - PoE Surge Protector - 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. - 浪湧保護時間 Surge Protection Attack Time : 1 ns - 最大保護電壓 Maximum Surge Voltage: 4kV - 最多保護次數 : 300 次(100A) Surge Life: 300 surges of 100A - RJ45 輸出/入 RJ45 Jack to RJ45 Jack - 能保護電源線和信號線 Power and signal line protection. - 兼容於第五類和超五類雙絞線 10/100 Base-T CAT5/CAT5e compatible. - 兼容與 802.3af PoE 規格 802.3af POE (Power over Ethernet) compatible.	歡迎查詢 Please ask	現貨 Available
27-61-1160	SP016C - Video Surge Protector for DVR in 1U Rack Mounting Panel - 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. - 浪湧保護時間 Surge Protection Attack Time : 1 ns - 最大保護電壓 Maximum Surge Voltage: 4kV - 最多保護次數 : 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	訂購 Booking
27-61-2160	SP016T - Video Surge Protector for DVR in 1U Rack Mounting Panel - 可從雷擊中保護器材免受破壞 Protects equipment from high voltage surges from nearby lightning strikes. - 浪湧保護時間 Surge Protection Attack Time : 1 ns - 最大保護電壓 Maximum Surge Voltage: 4kV - 最多保護次數 : 300 次(100A) Surge Life: 300 surges of 100A	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

25

Video Ground Loop Isolator

Video ground loop isolator could reduce "ground loop interference" with CCTV signals and can be easily installed in a new or added to existing systems. It is useful where a video signal is transmitted via cable between points with different ground potentials, the differences in ground potentials are typically caused by unbalanced power line loads.

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-61-3001	GL001 - Video Ground Loop Isolator - 無源式操作 · 無需電源 Passive, no power required. - 避免由環路接地造成視頻失真 Prevents video-signal distortion caused by video ground loops. - 消除畫面撕裂 · 串擾和滾動 Eliminates picture tearing, cross talk and rolling. - 避免電源線纜和 CCTV 系統互相干擾 Prevents power cables laid by others interfering with the CCTV system. - 內置浪湧保護 Built in TVS (Transient Voltage Suppressors) for surge protection.	歡迎查詢 Please ask	現貨 Available
27-61-6001	GB001 - Video Ground Loop Isolator - 與 GL001 相同功能 Identical to GL001 Ground Loop Isolator function. - 內置視頻 BALUN 轉換器 · 避免系統內相互干擾 Built in Video BALUN, perfect to work with DVR to immunity DVR interference, for extra interference rejection.	歡迎查詢 Please ask	現貨 Available
27-61-2001	TGP001 - Twisted Pair Video Ground Loop Isolator - 內置視頻 BALUN 轉換器 Built in Video BALUN . - 無源式操作 · 無需電源 Passive, no power required. - 避免由環路接地造成視頻失真 Prevents video-signal distortion caused by video ground loops. - 消除畫面撕裂 · 串擾和滾動 Eliminates picture tearing, cross talk and rolling. - 避免電源線纜和 CCTV 系統互相干擾 Prevents power cables laid by others interfering with the CCTV system. - 內置浪湧保護 Built in TVS (Transient Voltage Suppressors) for surge protection.	歡迎查詢 Please ask	訂購 Booking
27-61-3002	GL001H - Hi Performance Video Ground Loop Isolator - 無源式操作 · 無需電源 Passive type, no power need. - 環路接地隔離 Hi Performance to eliminate ground loop problem. - 免由環路接地造成視頻失真 Prevents video-signal distortion caused by video ground loops. - 消除畫面撕裂 · 串擾和滾動 Eliminates picture tearing, cross talk and rolling. - 避免電源線纜和 CCTV 系統互相干擾 Prevents power cables laid by others interfering with the CCTV system.	歡迎查詢 Please ask	現貨 Available

產品規格價錢及其供應如有更改 · 恕不另行通知。 All specifications, price and availability subject to change without notice.

26

Video Transformer Filter

"Impedance not matching" happened under long range cabling, or weak and strong differential signals into DVR would cause Video SYNC signal not balanced that results in picture "up-rolling". For coaxial cabling, add CB001VH (coaxial BALUN) for extra interference rejection; for twisted pair cabling, add TVB001.

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-61-6011	CB001VH - Coaxial BALUN for DVR - BNC male to BNC female with mini cable 30cm - Perfect work with DVR to immunity DVR interference - 使用高性能平衡式視頻收發 · 避免干擾 Built in a highly balanced mode of video transmission, which is immune to interference from these, and other sources of noise: data signals, other video signals, nearby power, ringing telephones, fluorescent lights, transformers, etc.	歡迎查詢 Please ask	現貨 Available
27-61-4001	TVB001 – Twisted Pair VIDEO BALUN - Eliminate interference under long range cabling caused by "Impedance Matching" 消除因"阻抗配對"造成的長距離傳送干擾 - Includes 4 pieces UY connectors 含四顆 UY 接線豆	歡迎查詢 Please ask	現貨 Available
27-61-5001	CHB001H – HF Interference Blocker Kit - 消除高頻干擾 Perfect to eliminate Hi Frequency Interference. - 使用一條同軸線收發視頻和音頻 Video & Audio over one Coax Cable. - 最遠距離：600 米(RG59), 180 米(雙絞線) Working distance: 600 meters (RG59), 180 meters (UTP cable). - 視頻信噪比 S/N Ratio on video signal: 42dB, 音頻信噪比 S/N Ratio on audio signal: 40dB. - 套裝含傳送器 · 接收器及兩個電源供應器 Including transmitter and receiver, two power adapter.	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

Power Converter & Distributor Box

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-39-1012	PC1A –AC to DC 12V Power Converter 1000mA - AC 轉 DC 電源轉換 · 最大提供 1A 電流 - AC to DC12V Power Converter with DC plug cable 1000mA Max. - 電源輸入 Input power: AC18~26V; DC18~28V. - 電源輸出 Output power: DC12V regulated (已穩壓).	歡迎查詢 Please ask	現貨 Available
27-39-0500	PC500S –AC to DC 12V Power Converter 500mA Built in Surge Protection - AC 轉 DC 電源轉換 · 最大提供 0.5A 電流 - AC to DC12V Power Converter with DC plug cable 500mA Max. - 電源輸入 Input power: AC15~26V; DC15~28V. - 電源輸出 Output power: DC12V regulated (已穩壓). - 輸入端含浪湧保護 Built in surge protection at power input.	歡迎查詢 Please ask	訂購 Booking
27-39-0505	PC500-5V –AC to DC5V Power Converter 500mA - AC24V/ DC12V 轉 DC5V, 最大提供 0.5A 電流 - AC24V/ DC12V to DC5V power converter with DC plug cable 500mA Max. - 電源輸入 Input power: AC8~26V; DC8~28V - 電源輸出 Output power: DC5V regulated. (已穩壓).	歡迎查詢 Please ask	訂購 Booking
27-39-0512	PC500 - AC to DC12V Power Converter - AC 轉 DC 電源轉換 · 最大提供 0.5A 電流 - AC to DC12V Power Converter with DC plug cable 500mA Max. - 電源輸入 Input power: AC15~26V; DC15~28V. - 電源輸出 Output power: DC12V regulated (已穩壓)	歡迎查詢 Please ask	現貨 Available
27-39-0009	PD009 –1 in 9 out Power Distributor Box - 每路獨立保險絲 (1.1Amps@250VAC) - Individually protected PTC*-type output fuse rated 1.1Amps@250VAC. - 每路獨立 LED 顯示狀態 Individual status LED indicators. - 輸出已作浪湧保護 Surge protected outputs. - 支援 1-30VAC/DC Supports up to 1-30VAC/VDC - 尺寸 Dimension: 138x84x28mm	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格價錢及其供應如有更改，恕不另行通知。 All specifications, price and availability subject to change without notice.

28