


YD1525L22-01




SPECIFICATIONS

Rated Input Power	0.5 W
Rated Impedance	8 ±15% ohm at 1K Hz 2.0V
Max Input Power	1 W
Rated Resonant Frequency	800 ± 20%Hz Without Baffle
Frequency Range	Fo- 20K Hz Output S.P.L -10dB
Sensitivity (S.PL)	96 ± 3 dB/0.5M at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ8 ×1.5 NdFeB
Housing Materia	ABS
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

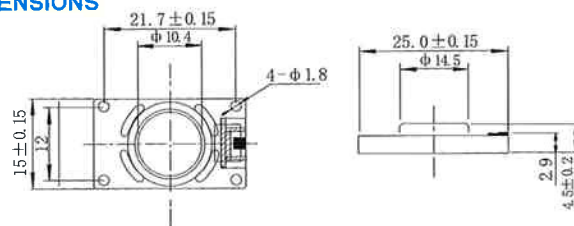

FREQUENCY RESPONSE

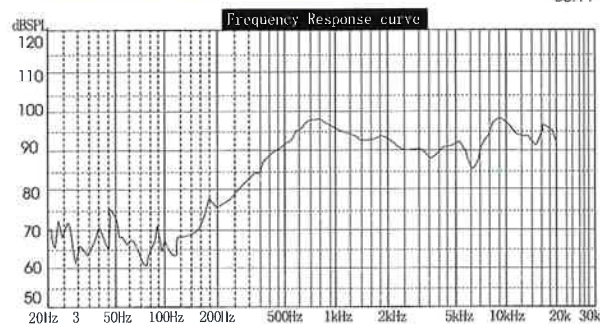


YD1635L21-01




SPECIFICATIONS

Rated Input Power	1 W
Rated Impedance	4 ±15% ohm at 1K Hz 2.0V
Max Input Power	2 W
Rated Resonant Frequency	500 ± 20% Hz Without Baffle
Frequency Range	Fo- 5K Hz Output S.P.L -10dB
Sensitivity (S.PL)	97 ± 3 dB/0.5M at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ8 ×1.5 NdFeB
Housing Materia	ABS
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

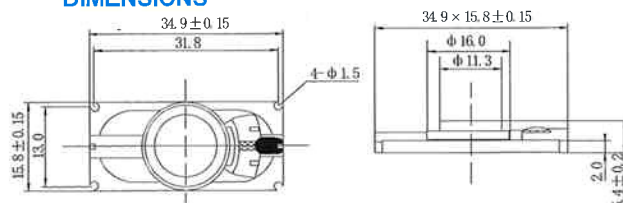

FREQUENCY RESPONSE

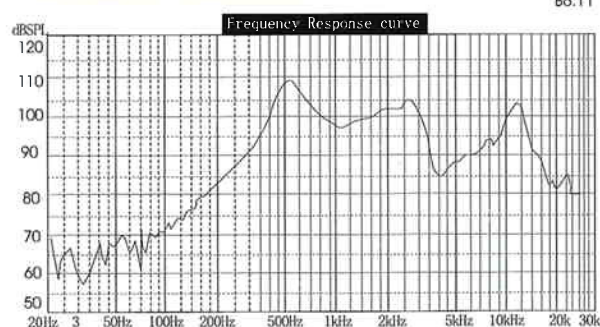


YD1635L22-01



SPECIFICATIONS

Rated Input Power	0.5 W
Rated Impedance	8±15% ohm at 1K Hz 2.0V
Max Input Power	1 W
Rated Resonant Frequency	450 ± 20% Hz Without Baffle
Frequency Range	Fo- 5KHz Output S.P.L -10dB
Sensitivity (S.PL)	99 ± 3 dB/0.5M at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ8 ×1.5 NdFeB
Housing Materia	ABS
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

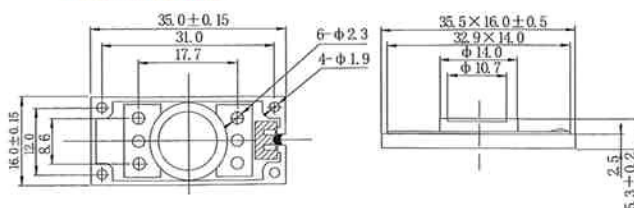

FREQUENCY RESPONSE

