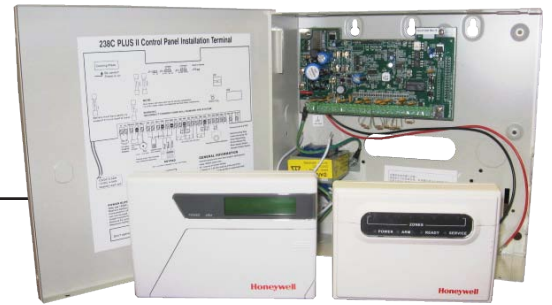**Honeywell**

238C Plus II

Control Panel

"SIMPLE IS PREFECT". Honeywell 238C Plus II intrusion system provides simple wiring, simple user interface, simple programming, stable operation and superior features to the users. The target of using 238C Plus II is easy to get the work done. System Integrator is not neccessory to go though complicated steps for system installation and setup, and the users can operate the systems easily via user friendly keypad.

238C Plus II system includes main control panel, LED and LCD keypad. This simple configuration offers the users a complete system with the functions 8 zones alarm input and 15 system user accounts, password key lock, 255 events log, and watch dog , AC power and phone line monitoring. With the combination of maximum 4 LED or LCD keypads, 238C Plus II serves the applications in residential areas, retail shops, offices and small scale of factories.

Features

- 8 on-board hardware zones
- 4 on-board trigger outputs
- 15 system user codes

- 255 events log viewable at system keypads with time/date
- Support up to 4 receiver numbers

- Selectable response 5ms, 50ms, 250ms, 500ms, 750ms

Specifications:

Electrical:
- 16.5VAC 25-40VA/50Hz transformer
- 10 hours standby at 500mA aux load with 6.5AH battery
- Combined Audible, AUX (SW) and keypads up to 800mA

Output Control:
- 4 low current on board trigger outputs

Zones:
- 8 zones hardwired zones
- Selectable response 5ms,50ms, 250ms, 500ms, 750ms

Communications Format:
- Ademco Contact ID
- DTMF
- CFSK III
- 3/1 (Single); 3/1 (Expand); 4/2; 4/1;

Keypads:
- LED keypad
- Alpha LCD keypad

Dimensions:
- Cabinet: W 267 x H 262 x D 78mm
- PCB: H95 x L170 x D30mm

Ordering:

100-01301	Control Panel includes Cabinet & AC Transformer
100-01608	Control Panel PCBA
A-000-940-01	LED Keypad
0-002-470-00	English LCD Alpha Keypad

May 2011
© 2011 Honeywell International Inc.

Honeywell