


YD2040L22-02




SPECIFICATIONS

Rated Input Power	1 W
Rated Impedance	8 ±15% ohm at 1K Hz 2.0V
Max Input Power	2 W
Rated Resonant Frequency	380 ± 20%Hz Without Baffle
Frequency Range	Fo- 3K Hz Output S.P.L.-10dB
Sensitivity (S.P.L)	96 ± 3 dB/0.5M at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ11×1.5NdFeB
Housing Materia	IRON
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

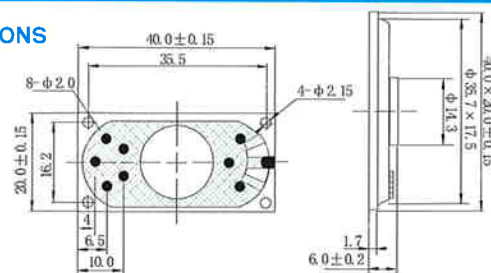

FREQUENCY RESPONSE

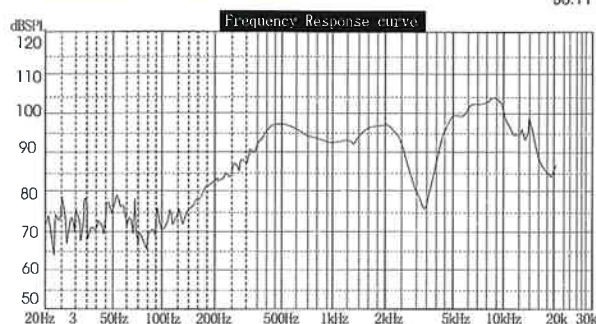


YD2840L22-01




SPECIFICATIONS

Rated Input Power	2 W
Rated Impedance	8 ±15% ohm at 1K Hz 2.0V
Max Input Power	4 W
Rated Resonant Frequency	400 ± 20%Hz Without Baffle
Frequency Range	Fo- 20K Hz Output S.P.L.-10dB
Sensitivity (S.P.L)	104 ± 3 dB/0.1M at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ12.0×2.5 NdFeB
Housing Materia	ABS
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

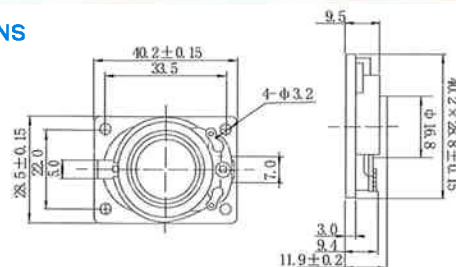

FREQUENCY RESPONSE

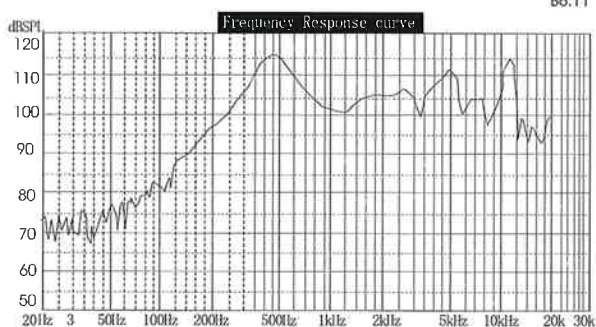


YD3070L12-12



SPECIFICATIONS

Rated Input Power	2 W
Rated Impedance	8 ±15% ohm AT 1KHz 2.0 V
Max Input Power	5 W
Rated Resonant Frequency	300 ± 20%Hz Without Baffle
Frequency Range	Fo- 20KHz MAX S.P.L. -10dB
Sensitivity (S.P.L)	86 ± 3 dB1W /0.5m Averang 0.6,0.81,0.1,2KHz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ 12.0× φ 2.5 NdFeB
Housing Materia	IRON
Net Weight	35 g
Operating Temperature	-10 ~ +40°C

DIMENSIONS

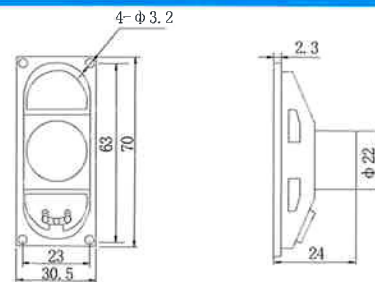

FREQUENCY RESPONSE

