


YD4070L21-01




SPECIFICATIONS

Rated Input Power	2 W
Rated Impedance	16 ±15% ohm AT 1KHz 5.65 V
Max Input Power	4 W
Rated Resonant Frequency	460 ± 20%Hz Without Baffle
Frequency Range	Fo- 20KHz Max S.P.L-10dB
Sensitivity (S.P.L)	97 ± 3 dB1W /0.5m Averang 0.6,0.81,0,1.2KHz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ 12.0× φ 2.0 NdFeB
Housing Materia	IRON
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

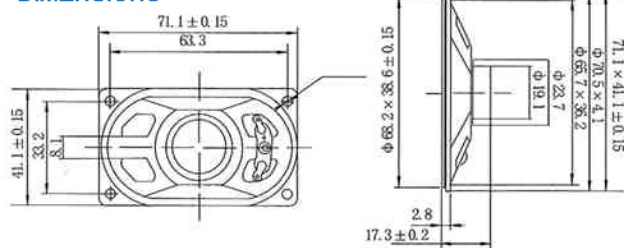

FREQUENCY RESPONSE

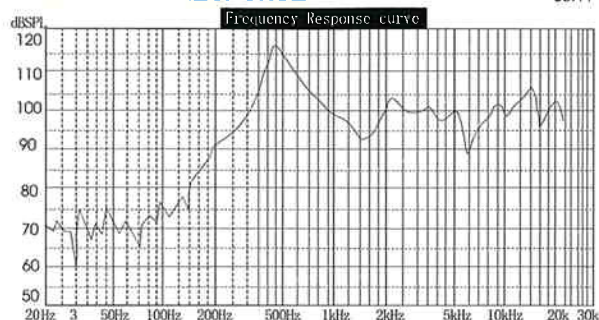


YD45L-1




SPECIFICATIONS

Rated Input Power	0.5 W
Rated Impedance	8±15% ohm at 1K Hz 2.0 V
Max Input Power	1 W
Rated Resonant Frequency	450 ± 25%Hz Without Baffle
Frequency Range	Fo- 4K Hz Output S.P.L-10dB
Sensitivity (S.P.L)	83 ± 3 dB at 1K Hz
Distortion	5% Max Rated Power Input 1K Hz
Magnet	φ32×18×6 Ferrite
Housing Materia	IRON
Net Weight	
Operating Temperature	-10 ~ +40°C

DIMENSIONS

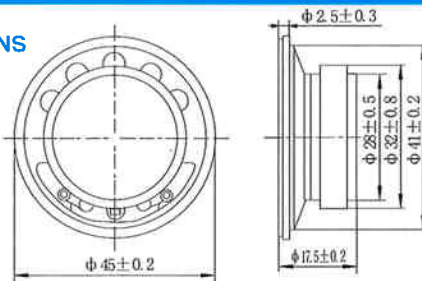

FREQUENCY RESPONSE

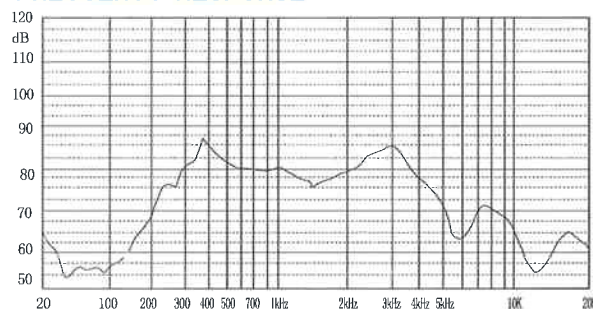


YD45L-12



SPECIFICATIONS

Rated Input Power	0.5w
Rated Impedance	16±15%OHM AT 1KHz 2.0V
Max Input Power	1W
Rated Resonant Frequency	600Hz±25% WITHOUT BAFFLE
Frequency Range	Fo- 4KHz OUTPUTS.P.L -10dB
Sensitivity (S.P.L)	85dB ± 3dB AT 1K Hz
Distortion	5%MAX RATED POWER INPUT 1000Hz
Magnet	φ12.5 ×1.7 NdFeB
Housing Materia	IRON
Net Weight	12 g
Operating Temperature	-10 ~ +40°C

DIMENSIONS

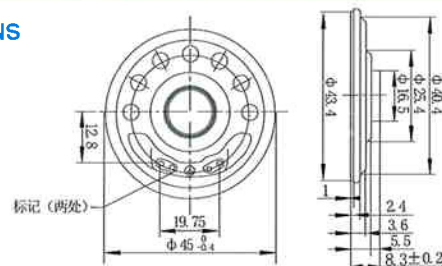

FREQUENCY RESPONSE

