



MUD-515

MUD-525 ✓

Uni-directional low impedance dynamic microphone with finest sound. High quality but low price. Die-cast zinc housing with coating finish.

| MODEL | MUD-515 | MUD-525 |
|-----------------------------|-----------------|---------|
| SPECIFICATION | | |
| Directional Characteristics | Uni-Directional | |
| Frequency Response | 80 ~ 12,000Hz | |
| Impedance | 600Ω | |
| Sensitivity (at 1000Hz) | -70dB ± 3dB | |
| Dimensions | 53φ x 180m/m | |
| Weight (w/o cord) | 280g | 260g |
| Cord | 4.5m | 4.5m |


MUD-515

Accessories furnished (See page 27)
 Cable: 112-160-450-27
 Holder: 110-004-000-00
 Optional accessories
 See page 26-27

MUD-525

Accessories furnished (See page 27)
 Cable: 112-155-450-22
 Holder: 110-004-000-00
 Optional accessories
 See pages 26-27

Frequency Response Curve:

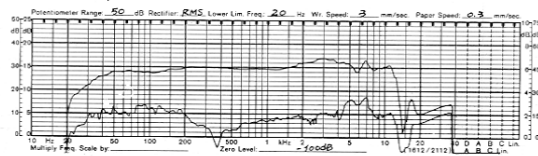

Available Cartridge: CUM-102 (OPM)