

Sounding & Strobe Devices

SP20S Electronic Siren

- Loud Single or Two-Tone Audible
- Surface mount design allows for easy installation in a variety of configurations
- Durable Construction
- Easy Hook-Up
- The colour and texture of the housing has been formulated to blend with common wall colours and surfaces
- 12VDC, 250mA
- 15 Watt 107dB @ 1M
- Two tone siren output wiring Red (+), Black (-); Single tone output wiring Yellow (+), Black (-)
- Dimensions: 110 x 95 x 46mm (H x W x D)



702 Electronic Siren

- Attractive appearance
- Extremely loud sound
- Siren and driver combined
- Dual channel (yelp or steady)
- Enclosed wires, easily tamper protection
- Built-in Tamper Plate protects wires from attack
- Weather resistant housing with horn throat gas kit
- 6-12 volt DC, 30 Watt power rating
- 118db @ 3m, 12VDC
- 400mA @ 6VDC, 1.2A @ 12VDC
- White wire negative (-), red wire (Warble), Yellow wire (steady)
- Dimensions: 146 x 203 x 241mm (H x W x D)



710RD Strobe Warning Light

- High intensity flashes for fast premises identification
- May be surface mounted or mounted on alarm bell housing
- 5 to 15 VDC operation
- 350mA @ 6VDC, 250mA @ 12VDC
- Flash Rate: 60 times per minute @ 6VDC (faster at higher voltages up to 15VDC max.)
- Weather resistant for outdoor use
- Available in clear, amber, red and blue
- Dimensions: 110 x 110 x 90mm (H x W x D)



Sounding & Strobe Devices

719 Electronic Siren

- Economical
- Combination speaker and siren driver
- Indoor and outdoor use
- Weather resistant , high impact construction
- Dual tone: yelp and steady
- 6-12 VDC
- 300mA @ 6VDC, 700mA @ 12VDC
- 15 Watt power rating; 115db @ 3m (12VDC)
- White wire negative (-), red wire (Warble), Yellow wire (steady)
- Dimensions : 140 H x 135 dia. x 180mm Depth



AG9 Sounder and Strobe

- 108dB audio output level
- High impact polycarbonate moulding
- Horizontal or vertical mounting
- Built-in 5 minute cut-off timer
- One standard built-in wrap around strobe lens
- Double skin construction
- High durability Mylar speaker
- 12VDC, 470mA (Hi), 240mA (Low)
- Colour Option: AG9B - White / Blue
AG9R - White / Red
- Dimension: 300 x 200 x 60mm (H x W x D)




747 Self Contained Siren

- 105dB output at 12VDC
- 15 watt power rating
- Dual tone: yelp and steady
- Durable ABS plastic
- Wired connect, easy mounting
- Voice coil impedance - 8 ohm
- Voice coil diameter - 20mm
- Current draw: 400mA @12VDC
- Tone frequency: Steady-1200HZ; Warble-800HZ to 1200HZ; 1 second ramp cycle
- Black wire negative (-), red wire (Warble), Yellow wire (steady)
- Magnet weight: 71g
- Dimensions: 102 x 102 x 51mm (H x W x D)



744 Multi-Tone Siren Driver

- 6 jumper-selectable tones
- Separate burglary and Fire alarm sounds
- Highest output (119dB) in its category
- Compatible with Ademco 8 - 16 Ohm speaker loads
- Powers many combinations of speakers (series, parallel, or series-parallel)
- Operates on 12VDC
- Current consumptions: 2.5A with 4 Ohm speaker load; 1.3A with 8 Ohm speaker load; 0.9A with 16 Ohm speaker load
- Dimension: 102 x 67 x 19mm (H x W x D)

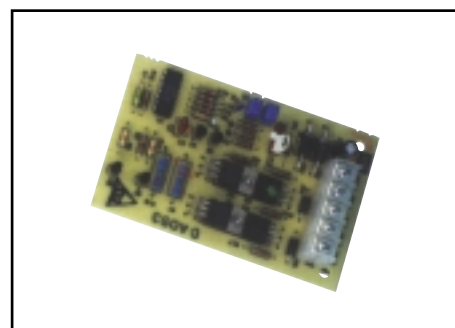

705-820 Horn Speaker

- 8 Ohm, 20 Watt
- Durable ABS plastic
- Small 127mm diameter speaker
- Indoor or outdoor use



For more information:

Asia Pacific Headquarters: Tel: (86) 21-5257 4568	India Tel: (91) 124 5105671
Australia Tel: (61) 1300 368 755	Korea Tel: (82) 2-799 6130
China Tel: (86) 755-8299 5168	Singapore Tel: (65) 6333 9563
Hong Kong Tel: (852) 2405 2323	Taiwan Tel: (886) 2-2245 1000

www.security.honeywell.com
security.ap@honeywell.com

Automation & Control Solutions

Honeywell Security - Asia Pacific
Honeywell International Inc.
www.honeywell.com

soundingsAP0505
©2005 Honeywell International Inc.

Honeywell