


REV.	REVISION	DATE

LC/PC SM CONNECTOR

LC/PC SM CONNECTOR

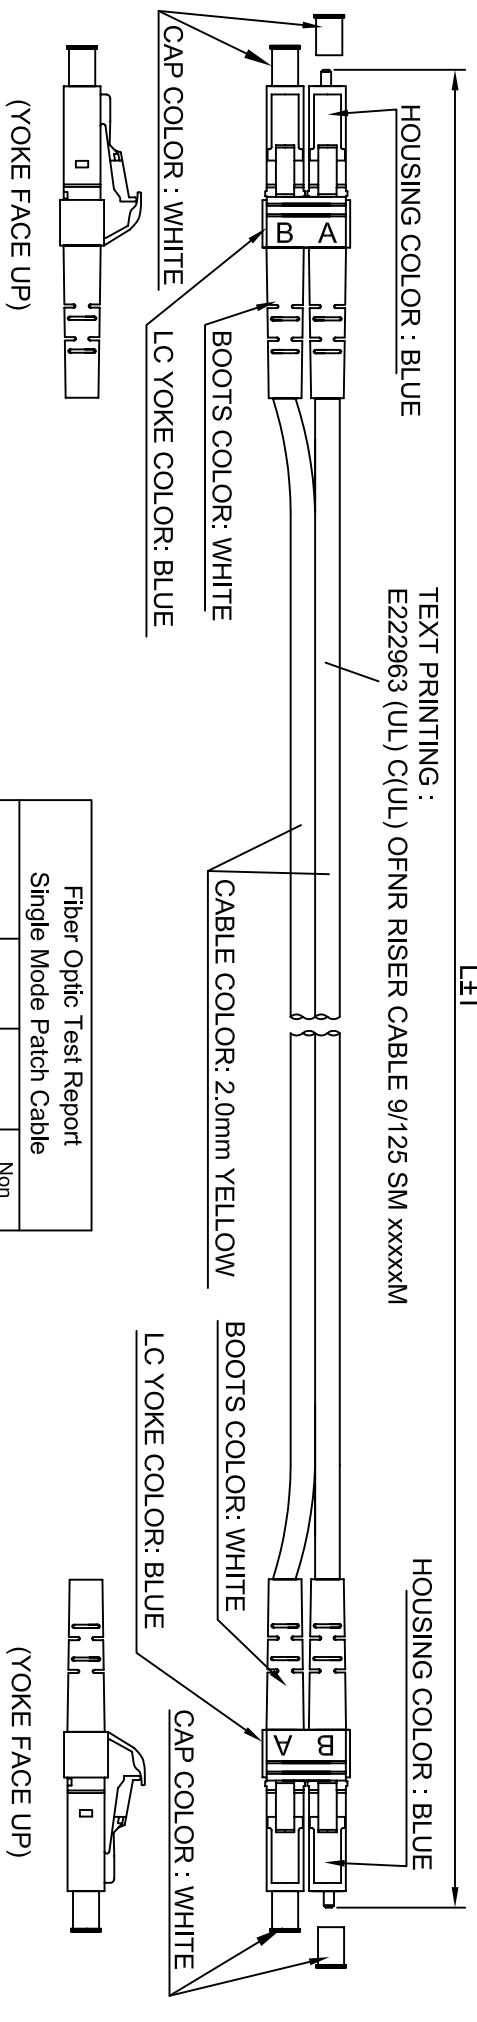

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C; 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE STRENGTH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"	QTY	LABEL
SMALL	POLYBAG (DETAIL C) & TEST REPORT	NONE
MEDIUM	POLYBAG	SEE "DETAIL B"
LARGE	POLYBAG ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON		



Fiber Optic Test Report			
Single Mode Patch Cable			
Insertion Loss	A	Printed	Non Printed
<0.3	B	PASS	PASS
Return Loss	A	Printed	Non Printed
>55dB	B	PASS	PASS

TEST REPORT

CHART	PART NO.	UNIT	DATE
FCLQCS30M	01	30	2011/10/20
FCLQCS20M	02	20	2011/10/20
FCLQCS15M	03	15	2011/10/20
FCLQCS10M	04	10	2011/10/20
FCLQCS07M	05	07	2011/10/20
FCLQCS05M	06	05	2011/10/20
FCLQCS03M	07	03	2011/10/20
FCLQCS02M	08	02	2011/10/20
FCLQCS01M	09	01	2011/10/20

TRENDIX TRENDIX INDUSTRIES (DONG GUAN) CO., LTD.

DRAWN BY: Liang	DATE: 2011/10/20	CUSTOMER: PONTOP	CUSTOMER PART NO: FCLQCS**M
CHECKED BY:	DATE:	DRAWING NO: PP1110001	REV: A
APPROVED BY:	DATE:	TRENDIX PART NO:	
SALE BY:	DATE:		

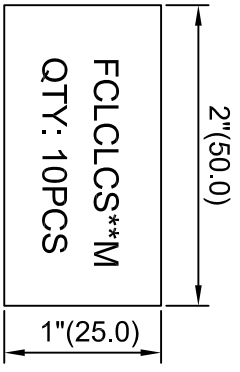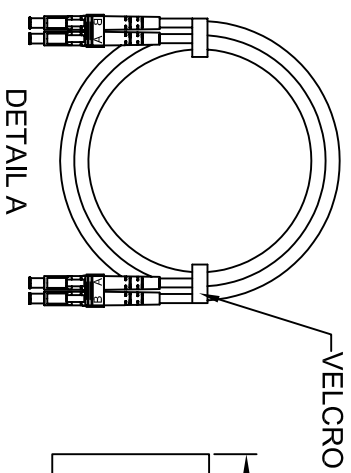

MADE IN CHINA

FIBER OPTIC PATCH CABLE
8.3/125 Singlemode, Yellow Duplex, PVC ZH Coat
LC to LC Duplex Connectors

RoHS COMPLIANT

DETAIL C