


球形spheroid head



高圆形high flat round head

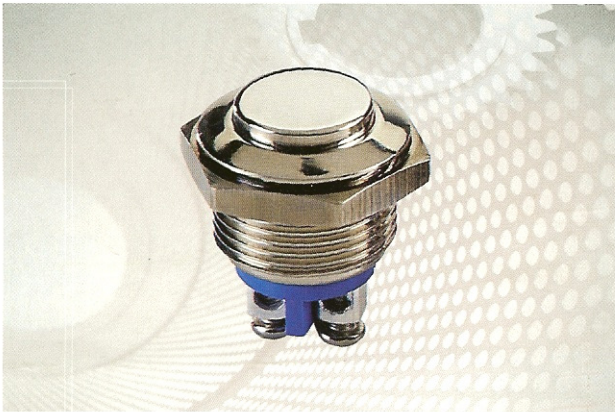

平圆形flat round head

◆ 技术特性 Technical Specification

- ◎ 带阻性负载的最大额定电流电压：2A/48 VDC
- ◎ 绝缘电阻：在500VDC时≥1000MΩ
- ◎ 原始接触电阻：在1A 2V时≤50 mΩ
- ◎ 触点与框架之间绝缘强度：交流2000V 50赫兹
- ◎ 电气寿命：100,000次
- ◎ 机械寿命：1,000,000次
- ◎ 电气功能：OFF (ON), ON(OFF)
- ◎ 螺母扭矩：5Nm ~ 14Nm
- ◎ 面板厚度：1 ~ 6mm
- ◎ 操作温度：-20℃~+55℃
- ◎ 防护等级：IP65
- ◎ 触点：黄铜镀银
- ◎ 外壳：黄铜镀镍 黄铜镀金 不锈钢
- ◎ 头部操作器：黄铜镀镍 黄铜镀金 不锈钢
- ◎ 螺孔接线端
- ◎ 面板开孔尺寸：Φ16 mm Φ19 mm
- ※ Max. current/voltage rating with resistive load: 2A/48 VDC
- ※ Insulation resistance: 1,000 MΩ mini. at 500 VDC
- ※ Initial contact resistance: 50 mΩ maxi. at 1A 2V
- ※ Dielectric strength: 2,000 Vrms. 50 Hz mini. Between terminals and frame
- ※ Electrical life: 100,000 cycles at full load
- ※ Mechanical life: 1,000,000 cycles
- ※ Electrical function: OFF (ON), ON(OFF)
- ※ Torque: 5 Nm min. ~ 14 Nm max. applied to nut
- ※ Panel thickness: 1 ~ 6 mm maxi
- ※ Operating temperature: - 20℃ ~ + 55℃
- ※ Degrees of protection: IP65
- ※ Contacts: Silver-plated brass
- ※ Bushing: Nickel-plated brass
Gold-plated brass
Stainless steel
- ※ Curved actuator: Nickel-plated brass
Gold-plated brass
Stainless steel
- ※ Screw terminals
- ※ Panel cut-out: Φ16 mm Φ19 mm

◆ 型号说明 Implication of Type

GQ	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/>	/	<input type="checkbox"/>
系列号 Code of series	安装尺寸Installation size: 16 Φ16mm 19 Φ19mm		头部形状 The head shape: B 球形spheroid head F 平圆形flat round head H 高圆形high flat round head		外壳材料The crust material: N 黄铜镀镍nickel-plated brass G 黄铜镀金gold-plated brass S 不锈钢stainless steel