




Neutrik- Rean RT4FC-B




| Product | |
|---------------------------|---------------------------|
| Gender | Female |
| Electrical | |
| Contact Resistance | < 5 mΩ |
| Dielectric Strength | > 0.5 kVdc |
| Insulation Resistance | > 1 GΩ |
| Rated Current per Contact | < 5 A |
| Mechanical | |
| Cable O.D. | 2.0 - 4.5 mm |
| Lifetime | > 1000 Mating Cycles |
| Wiring | Solder Contacts |
| Material | |
| Bushing | ABS |
| Contact Plating | Au |
| Contacts | Bronze |
| Insert | PA 6.6 30 % GF |
| Shell | Zinc Diecast |
| Shell Plating | Black |
| Strain Relief | PA6 |
| Environmental | |
| Solderability | Complies with IEC 68-2-20 |
| Temperature Range | -30 °C to +80 °C |

Features:


4-pole TINY cable connector (Mini XLR), black metal shell, gold plated contacts, Industrial bulk packaging

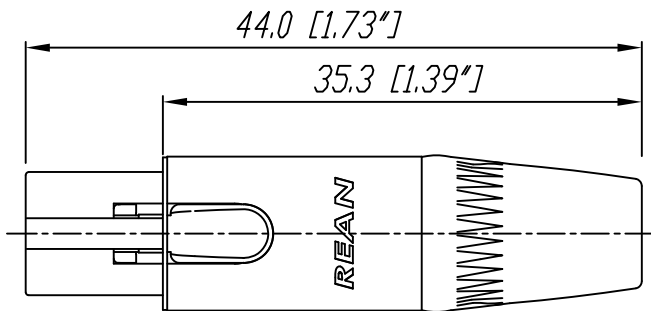

3 pole:



4 pole:



| | | | | | | | | | |
|------|-----------|-------|------|--|---------------------|-----------|--|----------------|----------------|
| | | | | *Lieferant darf ohne Ruecksprache nicht geaendert werden | Werkstoff: | Massstab: | | Datum | Name |
| | | | | Zeichnung urheberrechtlich geschuetzt (DIN 34) (C) | | 1:1 | | 19.10.09 | Battlogg |
| | | | | Benennung: | TINY XLR RT*FC-B | | | Ersetzt durch: | Blatt |
| | | | | | | | | Ersatz fuer: | von Blatt |
| | | | | | REAN | | | Zeichn. Nr. | 3102 ST 22 112 |
| Ind. | Aenderung | Datum | Name | | | | | | |