

## Neutrik – NA3MJ




<b>Product</b>	
Connector Type	Adapter
<b>Electrical</b>	
Contact Resistance	≤ 3 mΩ (XLR)
Dielectric Strength	1.5 kV dc / > 1 kVdc (XLR/Jack)
Insulation Resistance	> 2 GΩ
<b>Mechanical</b>	
Locking Device	Latch Lock
<b>Material</b>	
Contact Plating	2 μm Ag
Contacts	Brass (CuZn39Pb3) (XLR male)
Contacts	Bronze (CuBe2) (jack)
Insert	Polyamide (PA 6.6 30 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell Plating	gal Cu/Ni
<b>Environmental</b>	
Temperature Range	-20 °C to +65 °C

3 pole XLR male – stereo 1/4" Locking Jack (Tip, Ring, Sleeve contact)

### Features & Benefits

- Versatile, pre-wired and ready to use adapters to reliably interlock various connector systems
- Professional look and compact space saving design, based on the XX – XLR Series
- Rugged diecast shell for best reliability

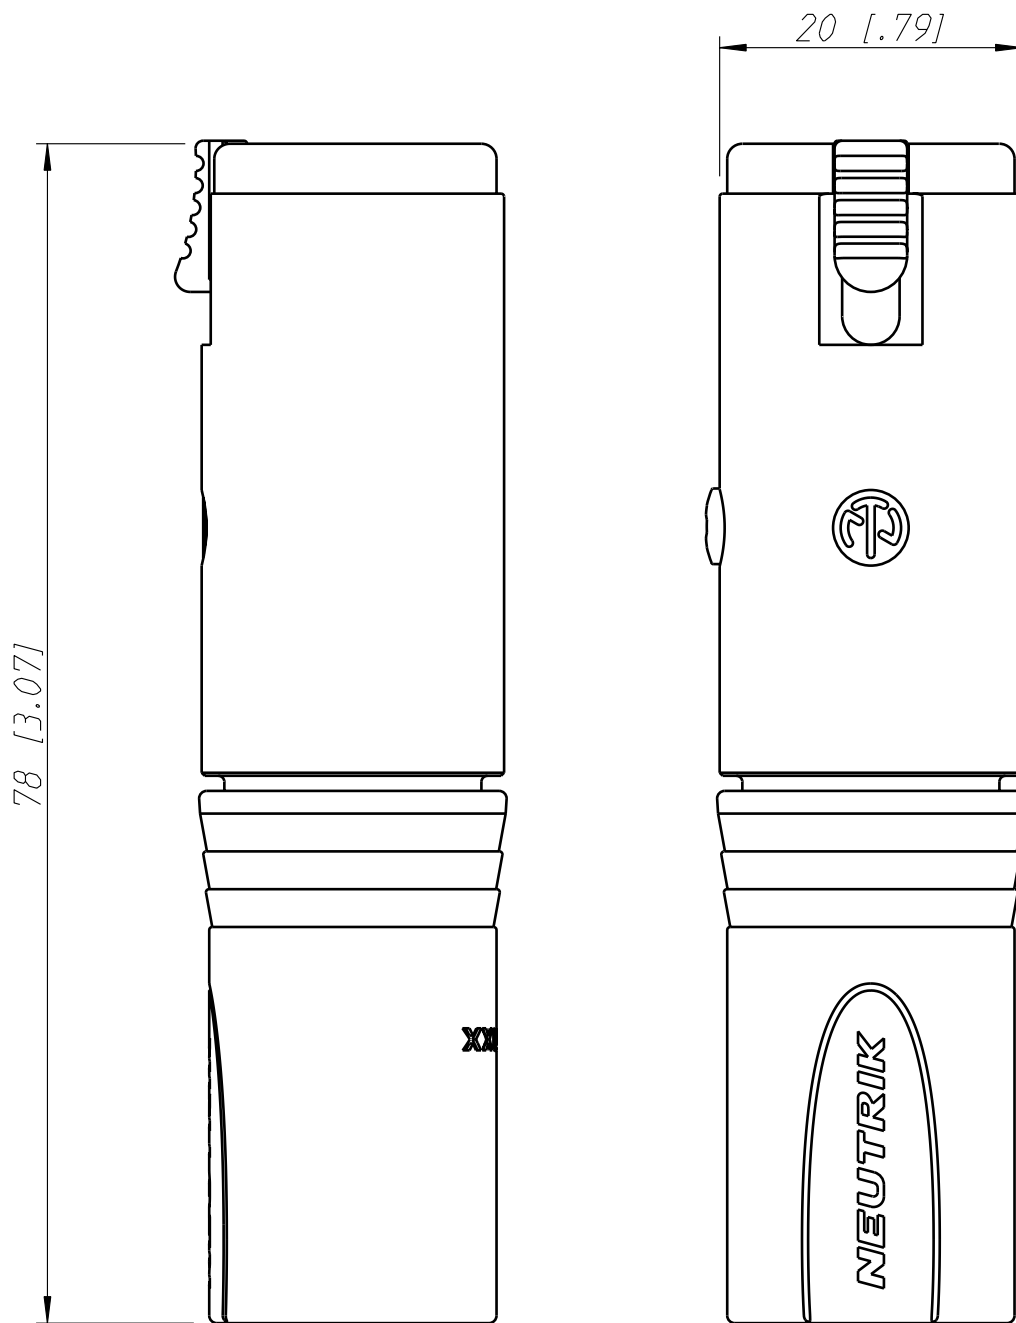

Allgemeintoleranzen ISO 2768-m	Werkstoff KEIN_MAT	Massstab: 2:1 (A4)		Datum	Name
			Gezeichnet	15.05.98	Alinjak
Zeichnung urheberrechtlich geschuetzt (DIN 34) (C)	-		Freigegeben	-	-
			Geaendert	28.03.07	Koch
Benennung NA3MJ NA3MJ			Aend.-Nr.		Aend.-Index
			-		A
NEUTRIK AG FL-9494 SCHAAN			Ersatz fuer:		Blatt 1 von 1 Bl.
			Zeichn. Nr.		ST-NA3MJ