

FED-A04 4-Channel H.264 DVR




Advanced Features:

- **H.264** compression Technology
- Support **4CH D1-Real Time** Recording
- Recording, Playback and Network Transmission up to 4 channels simultaneously
- Support USB ThruDrive and Network Backup
- **Digital Zoom** and **Picture-in-Picture (PIP)**.
- Alarm Detection
- **Mobile Monitoring** (Support **iPhone, Android, Windows Phone, Symbian** and **Blackberry**)
- Internet Explorer and Client Software for Remote Management
- Supports USB Mouse, IR remote and RS-485 PTZ Controller

主要特點：

- 採用 **H.264** 壓縮技術
- 支援 **4 個頻道 D1 實時錄影**
- 支援達 4 個頻道同時錄影、重播、網路傳輸
- 支援 USB 記憶體及網路備份
- 支援**電子放大**和**預覽畫中畫**功能
- 支援報警聯動功能
- 支援多個智能手機平台作監控 (包括 **iPhone、Android、Windows Phone、Symbian** 及 **Blackberry**)
- 支援 IE 瀏覽器及用戶端軟件作聯網管理
- 支援 USB 滑鼠、紅外線遙控器及 PTZ 控制器操作

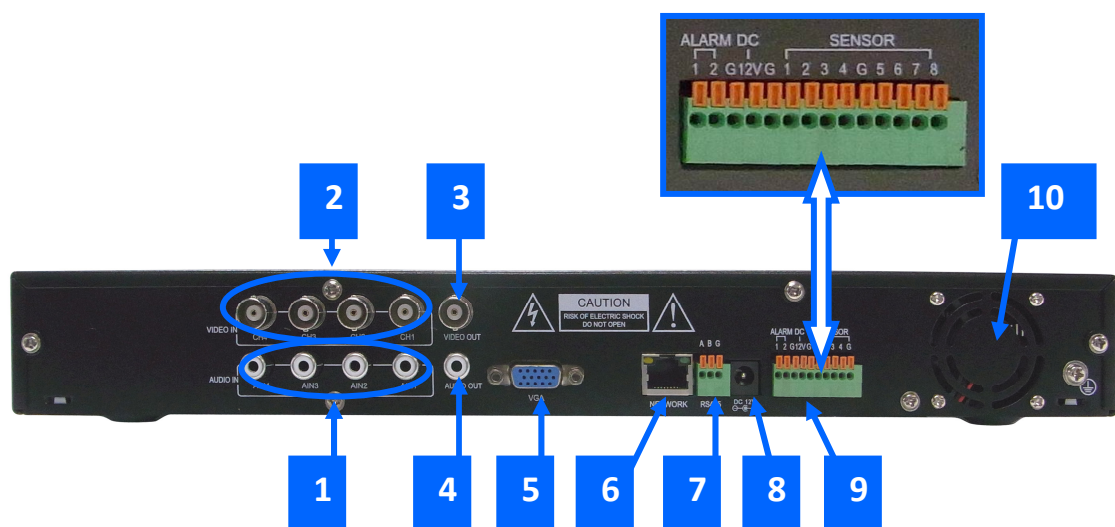

1	Audio in (4 Channels)	音訊輸入，共有 4 個接口
2	Video in (4 Channels)	視頻輸入，共有 4 個接口
3	Video out	視頻輸出
4	Audio out	音訊輸出
5	VGA monitor Output	VGA 影像輸出
6	Ethernet Port	網路接口
7	RS-485 Port	RS-485 接口
8	DC 12V Input	DC 12V 電源輸入
9	DC 12V Output, Alarm In / Out	DC 12V 電源輸出及報警輸入/出
10	Cooling Fan	散熱風扇

Specifications 產品規格

Model	型號	FED-A04
Operation System	作業系統	Embedded LINUX 作業系統
Video Compression Format	視訊壓縮格式	Standard H.264; 標準 H.264
Video Input	視頻輸入	4-Channel BNC, 1.0 Vp-p, 75 ohm; 4 路 BNC, 1.0 Vp-p, 75 ohm
Video Output	視頻輸出	1 x BNC, 1.0 Vp-p, 75 ohm; 1 x VGA (Up to 1280 x 1024)
Audio Input & Output	音訊輸入、輸出	4 x RCA in, 1 x RCA out
Display Mode	顯示模式	1 or 4 Channels, Support Digital Zoom and PIP; 1 或 4 路同步，支援電子放大及畫中畫
Live view Resolution	顯示解析度	PAL: D1 (704 x 576), NTSC: D1 (704 x 480)
Recording mode	錄影模式	Schedule, Manual, Motion Detection and Event Recording; 定時錄影、手動錄影、移動偵測錄影、報警觸發錄影
Max. Recording Rate	最大錄影幀率	PAL: 25fps, NTSC: 30fps (Per Channel, 每個頻道)
Max. Recording Resolution	最大錄影解析度	PAL: D1 (704 x 576), NTSC: D1 (704 x 480)
Playback	錄影重播	1 or 4 Channels simultaneously. (Fast Forward, Rewind and Frame-by-Frame); 1 路或 4 路同時重播，(倍速快放、快退及幀放)
Backup	錄影備份	Support USB, Removable HDD, Network Remote Backup according to Channel number or Time-frame; 支援 USB、移動硬碟、網路遠端備份；支持按檔案備份，支持按時間段備份
Network Transmission	網傳	4-Channel CIF Real-Time transmission; 4 路 CIF 即時網傳
Playback backup files	錄影播放	Dedicated Format and AVI-convertible; 備有專用播放軟體，並支援 AVI 檔案格式轉換
Alarm In & Out	報警輸入、輸出	4 Channels input and 1 Channel output; 4 路輸入，1 路輸出
Email Alert	郵件報警	Supported Email Alert with Captured JPEG; 支援圖片發送到指定 EMAIL
PTZ Mode	雲台	Supported PTZ Preset and Patrol; 支援雲台預置位設定及自動巡航
PTZ Protocol	雲台協議	PELCO-D, PELCO-P
Built-in Storage Interface	硬碟	Support 1 x SATA HDD (Up to 2TB); 支援 1 個 SATA 硬碟，單硬碟容量為 2TB
Hard Disk Remaining Time	硬碟剩餘錄影時間提示	Supported; 支持
Network Port & Protocol	網路介面和協定	1 x RJ-45 10/100M Ethernet port, supporting TCP/IP, DHCP, DNS, DDNS and NTP; 1 個 RJ-45 10/100M 乙太網接口，支援 TCP/IP、DHCP、DNS、DDNS、NTP 等協定
Remote Client Supported	支援遙距監控用戶端數量	At least 5 Clients simultaneously; 支援至少 5 個用戶同時線上訪問一台 DVR 主機
Mobile Monitoring	手機監控	iPhone, Android, Windows Phone, Symbian & Blackberry
Mouse Interface	滑鼠介面	USB1.1
Backup Interface	備份介面	USB2.0
Remote Controller	遙控器	Supported (Configurable Remote ID); 支持 (支持遙控器 ID 號匹配)
User Authority	用戶許可權	Support several levels of authority; 支援多級用戶許可權分配
Power Supply	電源	Max. DC12V/3A
Operation Temperature	工作溫度	0°C-50°C
Operation Humidity	工作濕度	10%-90%
Dimension	尺寸	354(W) x 45(H) x 230(D)mm