


# DS-6401/6404/6408HDI-T

## High Definition Video Decoder

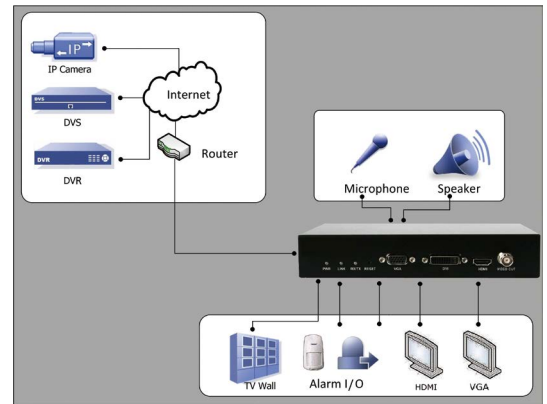

### Key features

- H.264 and MPEG4 video stream supported
- Up to 5 Megapixels resolution decoding
- HDMI and VGA output at up to 1920x1080P resolution
- SADP(IP Finder),UDP, RTP and NTP protocols
- Video display on TV wall
- Active and passive decoding modes
- 32 users with multi-user level management

### Rear Panel of DS-6400HDI-T



1. VGA outputs (VGA1 ~ VGA8)
2. HDMI video outputs (HDMI1 ~ HDMI8)
3. Line in/out
4. Audio out
5. RS-232 serial interface
6. LAN, 10/100/1000 Mbps Ethernet
7. RS-485 serial interface
8. Alarm in/alarm out(4 inputs/2 outputs)
9. GND
10. Switch
11. Power supply

	DS-6401HDI-T	DS-6404HDI-T	DS-6408HDI-T
<b>Video/Audio output</b>			
VGA output	1-ch 1920x1080@60 / 50Hz, 1600x1200@60Hz, 1280x1024@60Hz, 1280x720@50/60Hz, 1024x768@60Hz	4-ch	8-ch
HDMI output	1-ch 1920x1080@60 / 50Hz, 1600x1200@60Hz, 1280x1024@60Hz, 1280x720@50/60Hz, 1024x768@60Hz	4-ch	8-ch
CVBS output	1-ch	2-ch	4-ch
Audio output	1-ch, RCA connector	4-ch, DB15 connector	8-ch, DB15 connector
<b>Audio/Video Decoding</b>			
IP video input	H.264 / MPEG4/ MPEG2/ Private		
Decoding Capability	2-ch at 5MP 4-ch at 1080P 8-ch at 720P 16-ch at 4CIF resolution	4-ch at 5MP 8-ch at 1080P 16-ch at 720P 32-ch at 4CIF resolution	8-ch at 5MP 16-ch at 1080P 32-ch at 720P 64-ch at 4CIF resolution
Multi-division Display	1 / 4 / 9 / 16		
Audio compression	G.722 / G.711A / G.711U / MPEG2-L2 / ACC		
Two-way audio input in	2-ch, 3.5mm connector (2.0 Vp-p, 1 kΩ)		
<b>External interface</b>			
Network Interface	1; 10 / 100 / 1000Mbps self-adaptive Ethernet interface		
Serial Interface	1 RS-232 (DB9), 1 RS-485		
Alarm In	4		
Alarm Out	4		
<b>General</b>			
Power Supply	12 VDC	100 ~ 240 VAC	100 ~ 240 VAC
Power Consumption	Max. 15W	Max. 70W	Max. 70W
Working temperature	-10 °C ~ +55 °C		
Working Humidity	10% ~ 90%		
Chassis	19-inch rack-mounted 1U chassis	19-inch rack-mounted 1.5U chassis	19-inch rack-mounted 1.5U chassis
Dimensions (W x D x H)	220x180x45mm	440x340x70mm	440x340x70mm
Weight(without HDD)	1.12 kg	5.2 kg	5.2 kg