




美國品牌
終身保修

華輝
WECL
港澳代理商

- 廣受各大工程公司採用
- 榮獲得多項歐美認證

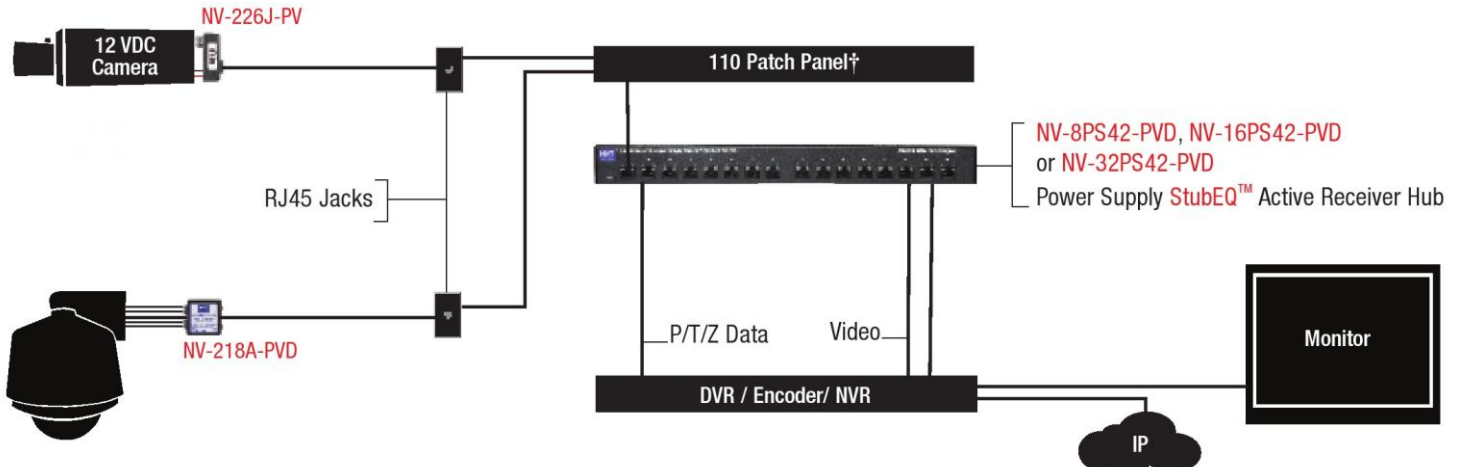

HYBRID VIDEO PRODUCT SOLUTIONS



目錄 Index

內容 Content

頁 Page



關於 NVT
About NVT

2



閉路電視產品
CCTV Products

3



DigitalEQ™ 有源集線器
DigitalEQ™ Active Hubs

8



PVD™ 攝像機 - 終端設備
PVD™ Camera - End Devices

9



多頻道電源電纜集成集線器

11



Multi-Channel Power Supply Cable Integrator Hubs



多頻道電源無源接收集線器

12



Multi-Channel Power Supply Passive Receiver Hubs



電源，視頻和數據產品
Power, Video and Data Products

13

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 1



Who is NVT?

NVT is the worldwide leader in UTP CCTV video and camera power transmission. Our focus on this technology enables us to supply excellence in product quality and world-class customer support.

Constant product research and evaluation guarantees that NVT's product offering contains technologies and user interfaces that work for

the customer. We only supply products that are best in class, easy to use, and well supported. All NVT products are UL and cUL listed and CE, WEEE and RoHS compliant.

Consistent Stock Availability

We expect our customers to be able to place an order with us, large or small, and receive a professional reception and same day shipment. NVT is sold through hundreds of CCTV product distributor and direct dealer locations worldwide.

Fast and Reliable Delivery Capability

Our goal is fast and reliable delivery of customer orders. This commitment is the primary objective of our logistical infrastructure. Items ordered prior to 4:00PM (PST Monday to Friday) will typically ship the same day.

Limited Lifetime Warranty and Advance Replacement

We offer a unique limited lifetime warranty. If an NVT product fails for any reason, any time, it will be replaced. Just call customer service to make arrangements to return the product and arrange for an advanced replacement shipment.

Superior Technical and Application Support

Our technical staff is trained to provide first line support on every product we sell, providing installers with the reassurance of expert technical backup.

Customer/Technical Support

NVT customer support can be reached 8:00AM to 5:30PM PST at (+1) 650.462.8100.

Corporate Office

4005 Bohannon Drive
Menlo Park, CA 94025 USA

+1.650.462.8100 | OFFICE
+1.650.326.1940 | FAX

www.nvt.com/email
www.nvt.com

UK Office

NVT House
99 Waldegrave Road
Teddington
Middlesex
TW11 8LA
United Kingdom

+44 (0) 208.977.6614 | OFFICE
+44 (0) 208.973.1855 | FAX


www.nvt.com/email
www.nvt.com




產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice.

- Fiber-like quality at a fraction of the cost
- Superior interference immunity
- Transmit longer distances than coax
- Potential of using existing cable
- Lower labor costs to install vs. coax {(1) 25 pair pull = (1) coax pull}
- Higher density than coax (1/10th the size)
- UTP is a multi-use cable
- Easier termination and/or repair than coax or fiber
- Lower cost for cable, cable trays, and conduit
- Built-in transient protection


Passive to Passive Application up to 750ft (225m)

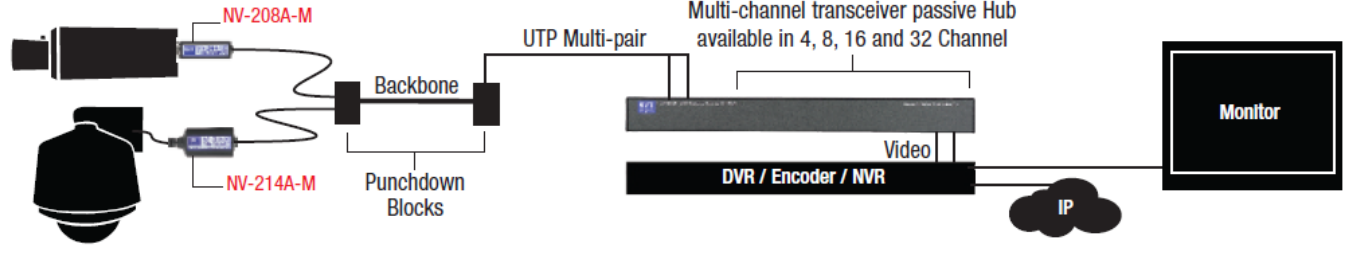

Passive to Active Application up to 3,000ft (1km)

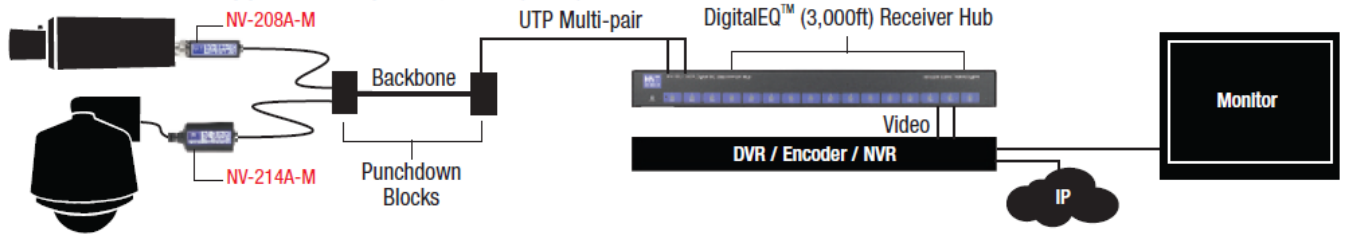

Active to Active Application up to 1 mile (1,6km)

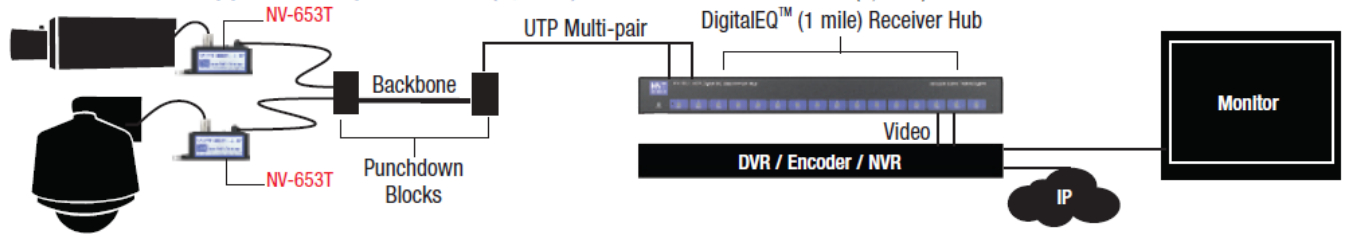

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-20-0214	<p>NV-214A-M Single Channel Passive Transceivers with 9" Mini Coax Pigtail/Male BNC Screwless</p> <ul style="list-style-type: none"> ● No power required ● Built-in transient protection ● Supports "up-the-coax" type control ● Transmit with another passive NVT transceiver up to 750ft (225m) ● Transmit up to 1,500ft (460m) if used with an NVT StubEQ™ active receiver ● Transmit up to 3,000ft (1km) if used with an NVT DigitalEQ™ active receiver 	歡迎查詢 Please ask	現貨 Available



歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 3

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-0208	NV-208A-M Single Channel Video Passive Transceiver <ul style="list-style-type: none"> ● Full-motion CCTV video at distances up to 750ft (225m) when used with any passive NVT transceiver or hub ● Up to 3,000ft (1km) with a NVT DigitalEQ™ hub or active receiver ● Up to 1,500ft (460m) with a NVT StubEQ™ hub ● Male BNC allows connection directly to the camera or DVR ● Reliable Screwless UTP terminal connection ● No power required ● Exceptional interference rejection ● Frequency Response DC to 10 MHz ● Built-in transient protection ● Supports “up-the-coax” type control signal up to 750ft (225m) 	歡迎查詢 Please ask	訂購 Booking
27-20-0213	NV-213A Single Channel Video Passive Transceiver <ul style="list-style-type: none"> ● Full-motion CCTV video at distances up to 750ft (225m) when used with any passive NVT transceiver or hub ● Up to 3,000ft (1km) with a NVT DigitalEQ™ hub or active receiver ● Up to 1,500ft (460m) with a NVT StubEQ™ hub ● Mini-coax pigtail supports in-camera mounting in most dome cameras ● No power required ● Exceptional interference rejection ● Frequency Response DC to 10 MHz ● Built-in transient protection with separate ground connection ● Supports “up-the-coax” type control signal up to 750ft (225m) ● Limited lifetime warranty 	歡迎查詢 Please ask	訂購 Booking
27-20-0652	NV-652R Active Video Receiver <ul style="list-style-type: none"> ● Single channel active receiver with screw terminal video input ● Use with an NVT passive transceiver at distances up to 3,000ft (1km) ● Distances up to 1 mile (1,6km) when used with an NV-653T transmitter ● Built-in transient protection and ground lifting ● Built-in manual brightness and sharpness controls ● Blue power LED, green video receive LED ● Power supply not included ● Requires floating 12-24VAC/DC ● Up to 10 NV-652Rs may be rack mounted using the NV-RM8/10 rack panel kit 	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice.

4

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存貨 Stocks
27-20-0653	NV-653T Active Video Transmitter <ul style="list-style-type: none"> ● Full-motion CCTV video at distances up to 1 mile (1,6km) when used with active NVT receiver or hub ● Exceptional interference rejection ● Built-in transient protection and ground lifting ● Three-position distance range switch ● Blue power LED, green active LED ● Power supply not included ● Requires floating 24VAC/DC ● Up to 10 NV-653Ts may be rack mounted using the NV-RM 8/10 rack panel kit 	歡迎查詢 Please ask	現貨 Available
27-20-1413	NV-413A Four Channel Passive Video Transceiver <ul style="list-style-type: none"> ● 4-channel passive transceiver with RJ45 or screw terminal video termination ● Supports "up-the-coax" type control signal up to 750ft (225m) ● Distances up to 750ft (225m) when used with an NVT passive transceiver ● Use with an NVT StubEQ™ active receiver for distances up to 1,500ft (460km) ● Transmit up to 3,000ft (1km) if used with an NVT DigitalEQ™ active receiver ● No power required ● Built-in transient protection ● Two NV-413As may be rack mounted using the NV-RM8/10 rack panel kit 	歡迎查詢 Please ask	訂購 Booking
27-20-0452	NV-452R Four Channel Active Video Receiver <ul style="list-style-type: none"> ● 4-channel active receiver with RJ45 or screw terminal video input ● Distances up to 3,000ft (1km) when used with an NVT passive transceiver ● Distances up to 1 mile (1,6km) when used with an NV-653T transmitter ● Built-in transient protection and ground lifting ● Built-in manual brightness and sharpness controls ● Blue power LED, green video receive LED ● Two NV-452Rs may be rack mounted using the NV-RM8/10 rack panel kit ● Power supply not included ● Requires floating 24VAC/DC 	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 5

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-0418	NV-418A Dual Passive Video/Audio Transceiver <ul style="list-style-type: none"> ● Dual Full-motion monochrome or color video and audio at distances up to: <ul style="list-style-type: none"> ■ - 750ft (225m) when used with another NV-418A ■ - 3,000ft (1km) when used with an active receiver such as the NV-518A ● No power required ● Built-in transient protection ● Exceptional interference rejection ● Supports "up-the-coax" type control signals ● Frequency Response DC to 10 MHz ● RJ45 and RCA jack connections ● Limited lifetime warranty 	歡迎查詢 Please ask	訂購 Booking
27-20-0518	NV-518A Dual Video/Audio Transceiver <ul style="list-style-type: none"> ● Dual full-motion monochrome or color video and audio ● Distances up to 3,000ft (1km) when used with a passive transceiver ● Exceptional interference rejection ● Built-in transient protection and ground lifting ● Built-in brightness and sharpness controls, Power LED, and Active LED ● Frequency Response DC to 10 MHz ● BNC, 1/4" Phone and RJ45 jack connections ● May be used as a repeater for one way video/audio applications ● Limited lifetime warranty 	歡迎查詢 Please ask	訂購 Booking
27-20-1813	NV-813S Video Transceiver Hub <ul style="list-style-type: none"> ● Compact rack mountable 19" 1U high enclosure features 8 ports and only 1" deep ● Use with any NVT passive transceiver or hub at distances up to 750ft (225m) ● Use with any NVT active receiver or hub as a rack-mountable passive transmitter for distances up to 3,000ft (1km) ● Compatible with qualified UTP cameras ● No power required ● Built-in transient protection ● Supports "up-the coax" type control signal up to 750ft (225m) ● Limited lifetime warranty ● 2-NV-RJ45A RJ45 to screw terminal adaptors included 	歡迎查詢 Please ask	現貨 Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 6

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-2613	NV-1613S Video Transceiver Hub <ul style="list-style-type: none"> ● Compact rack mountable 19" 1U high enclosure features 8 ports and only 1" deep ● Use with any NVT passive transceiver or hub at distances up to 750ft (225m) ● Use with any NVT active receiver or hub as a rack-mountable passive transmitter ● for distances up to 3,000ft (1km) ● Compatible with qualified UTP cameras ● No power required ● Built-in transient protection ● Supports "up-the coax" type control signal up to 750ft (225m) ● Limited lifetime warranty ● 2-NV-RJ45A RJ45 to screw terminal adaptors included 	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 7

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-0872	NV-872 Eight Channel DigitalEQ™ Receiver DA Hub <ul style="list-style-type: none"> ● Four distribution amplifier video outputs per channel ● Includes (8) 2ft (60cm) coax jumper cables, rack mount hardware and (2) screw terminal adaptors (NV-RJ45A see back page) 	歡迎查詢 Please ask	訂購 Booking
27-20-1672	NV-1672 Sixteen Channel DigitalEQ™ Receiver DA Hub <ul style="list-style-type: none"> ● Two distribution amplifier video outputs per channel ● Includes (16) 2ft (60cm) coax jumper cables, rack mount hardware and (4) screw terminal adaptors (NV-RJ45A see back page) 	歡迎查詢 Please ask	訂購 Booking
27-20-3272	NV-3272 Thirty-Two Channel DigitalEQ™ Receiver Hub <ul style="list-style-type: none"> ● Includes (32) 2ft (60cm) coax jumper cables, rack mount hardware and (8) screw terminal adaptors (NV-RJ45A see back page) 	歡迎查詢 Please ask	訂購 Booking

- Per channel fully automatic 4-band, digital signal distance equalization
- Polarity correction
- Use with an NVT passive transceiver for distances up to 3,000ft (1km)
- Use with an NV-653T active transmitter for distances up to 1 mile (1,6km)
- Supports screw-terminal or RJ45 UTP video inputs
- High-Density 19" 1U high enclosure
- Built-in transient protection and ground lifting

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask.

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 8

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-0216	<p>NV-216A-PV Single Channel Video Transceiver</p> <ul style="list-style-type: none"> ● Male BNC connector supports on-camera mounting ● Single channel Power-Video transceiver with RJ45 jack ● Male BNC video and 18 AWG power connections ● Compatible with NVT's PVD architecture and EIA/TIA568B ● Video distances up to 750ft (225m) when used with another passive transceiver ● Video distances up to 1,500ft (460m) when used with a StubEQ™ active receiver ● Video distances up to 3,000ft (1km) when used with an NVT manual adjust active receiver or DigitalEQ™ active receiver ● Supports "up-the-coax" type control signal up to 750ft (225m) when used with a passive transceiver ● Exceptional interference rejection ● Built-in transient protection 	歡迎查詢 Please ask	現貨 Available
27-20-0218	<p>NV-218A-PVD Single Channel Video Transceiver</p> <ul style="list-style-type: none"> ● Single channel Power-Video-Data transceiver with RJ45, BNC and screwless video terminals ● Compatible with NVT's PVD architecture and EIA/TIA568B ● Mini-coax pigtail supports in-camera mounting in most dome cameras ● Video distances up to 750ft (225m) when used with another passive transceiver ● Video distances up to 1,500ft (460m) when used with a StubEQ™ active receiver ● Video distances up to 3,000ft (1km) when used with an NVT manual adjust active receiver or DigitalEQ™ active receiver ● Supports "up-the-coax" type control signal up to 750ft (225m) when used with a passive transceiver ● Exceptional interference rejection ● Built-in transient protection 	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 **Special offer for members and projects, please ask.**

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 9

產品編號 Code 產品型號及描述 Model No. and Description 價目 Price (HK\$) 存倉 Stocks

27-20-0226



NV-226J-PV Single Channel Video Transceiver +12VDC Converter

- Converts 24 VAC to 12 VDC at up to 400 mA to power cameras at long distances
- Male BNC connector supports on-camera mounting
- RJ45 jack compatible with NVT's PVD architecture and EIA/TIA 568B
- Video distances up to 750ft (225m) when used with another passive transceiver
- Video distances up to 1,500ft (460m) when used with a StubEQ™ active receiver
- Video distances up to 3,000ft (1km) when used with an NVT manual adjust active receiver or DigitalEQ™ active receiver
- Exceptional interference rejection
- Built-in transient protection

歡迎查詢 現貨
Please ask Available

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 10



NV-4PS10-PVD Four Channel



NV-16PS10-PVD Sixteen Channel

產品編號 Code	產品型號 Model No.	價目 Price (HK\$)	存倉 Stocks
27-20-0410	NV-4PS10-PVD Four Channel	歡迎查詢 Please ask	訂購 Booking
27-20-1610	NV-16PS10-PVD Sixteen Channel	歡迎查詢 Please ask	現貨 Available

- Provides Class 2 SELV camera power, pass through video and telemetry data connection from 4 – 16 cameras, each via a single RJ45 4-pair UTP cable
- Standard telecom/datacom structured cabling pinouts per EIA/TIA 568B
- Independently selectable 24 or 28 VAC with 1 Amp max per channel (10 Amp aggregate)
- Automatic-reset fault protection, transient protection
- Individually floating outputs ensure total ground-loop immunity
- Diagnostic LEDs show load/no load, miswires and overload conditions
- Use with the NV-216A-PV, NV-218A-PVD or the NV-226J-PV transceiver at the camera and passive or active receivers at the control room
- Power cameras via UTP over significant distances
- 1U high; wall, desk or rack-mountable.

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 11



NV-4PS13-PVD Four Channel



NV-8PS13-PVD Eight Channel



NV-16PS13-PVD Sixteen Channel

產品編號 Code	產品型號 Model No.	價目 Price (HK\$)	存倉 Stocks
27-20-0413	NV-4PS13-PVD Four Channel	歡迎查詢 Please ask	訂購 Booking
27-20-0813	NV-8PS13-PVD Eight Channel	歡迎查詢 Please ask	現貨 Available
27-20-1613	NV-16PS13-PVD Sixteen Channel	歡迎查詢 Please ask	現貨 Available

- Provides Class 2 SELV camera power, pass through video and telemetry data connection from 4 – 16 cameras, each via a single RJ45 4-pair UTP cable
- Standard telecom/datacom structured cabling pinouts per EIA/TIA 568B
- Independently selectable 24 or 28 VAC with 1 Amp max per channel (10 Amp aggregate)
- Automatic-reset fault protection, transient protection
- Individually floating outputs ensure total ground-loop immunity
- Diagnostic LEDs show load/no load, miswires and over load conditions
- Use with the NV-216A-PV, NV-218A-PVD or the NV-226J-PV transceiver at the camera for video distances up to 750ft (1km)
- Power cameras via UTP over significant distances
- 1 U high; wall, desk or rack-mountable

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 12

產品編號 Code	產品型號及描述 Model No. and Description	價目 Price (HK\$)	存倉 Stocks
27-20-0704	<p>NV-704J-PVD 4 Channel Cable Passive Integrator</p>  <ul style="list-style-type: none"> ● Connectivity for up to four cameras, each via a single RJ45 4-pair cable ● Use with the NV-216A-PV or NV-218A-PVD transceivers or the NV-226J-PV transmitter at the camera ● Uses any third-party power supply to power cameras via UTP over significant distances (see Power Distance Calculator) ● Cable-management solution from the camera to the Wiring Closet and on to the Control Room ● Frequency Response DC to 10 MHz ● Wall-mountable; rack-mountable using the NV-RM8/10 panel ● Limited lifetime warranty 	歡迎查詢 Please ask	訂購 Booking
27-20-0716	<p>NV-716J-PVD 16 Channel Cable Passive Integrator Hub</p>  <ul style="list-style-type: none"> ● Connectivity for up to sixteen cameras, each via a single RJ45 4-pair cable ● Use with the NV-216A-PV or NV-218A-PVD transceivers or the NV-226J-PV transmitter at the camera ● Uses any third-party power supply to power cameras via UTP over significant distances (see Power Distance Calculator) ● Frequency Response DC to 10 MHz ● Cable-management solution from the camera to the Wiring Closet and on to the Control Room ● 1U high; 1" deep; wall or rack-mountable ● Limited lifetime warranty 	歡迎查詢 Please ask	訂購 Booking

歡迎垂詢會員及工程項目優惠價 Special offer for members and projects, please ask

產品規格、價格及其供應如有更改，恕不另行通知。 All Specifications, prices and availability subject to change without notice. 13