



4-Port USB KVM Switch with Audio Support CS1734

ATEN's new 4-port KVM and Peripheral Sharing Switch brings extra value to conventional KVM switches by offering USB peripheral sharing capabilities, audio and microphone support, and multi-platform support for Mac, Sun, USB and PS/2. You can save money and space by eliminating the need for multiple monitors, keyboards, mice, and peripheral devices such as printers, scanners, zip drives, and more. Up to 127 different USB devices can be daisy chained from this KVM switch. Sharing speakers and a microphone also offers extra value and convenience for the users. USB and KVM technology together makes cross-platform management easy. A single USB console can control PCs, Macs, or even Sun workstations, and share peripherals and audio devices between the computers. Any USB-enabled computers, using any USB-compatible operating system, can benefit from the efficiency, expense reduction and convenience of this switch.


Distributor Part NO. : Contact Aten for part number @ 949.428.1111

I Features:

- Dual interface-supports computers with PS/2 or USB keyboards and mice.
- One console controls 4 computers and 2 additional USB devices.
- Buzzer ON/OFF via hotkey.
- Complete keyboard and mouse emulation for error free booting and realtime switching.
- Easy installation - no software required.
- Superior video quality; 2048 x 1536; DDC2B. A life time of firmware upgrading.
- Audio enabled.
- Bidirectional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM Switch focus.
- OS Compatibility: DOS, WIN98, WIN ME, WIN NT, WIN 2K, WIN 2003, WIN XP, LINUX, Mac OS 8.6/9/10 and SUN Solaris 8/9.

I Diagram :

1. Port selection switches
2. USB Console ports for keyboard and mouse
3. Audio ports for speakers, microphone etc.
4. USB ports for two USB Peripherals
5. Power adapter
6. Monitor, speakers, mic connection
7. Computer connections (PC and Mac)

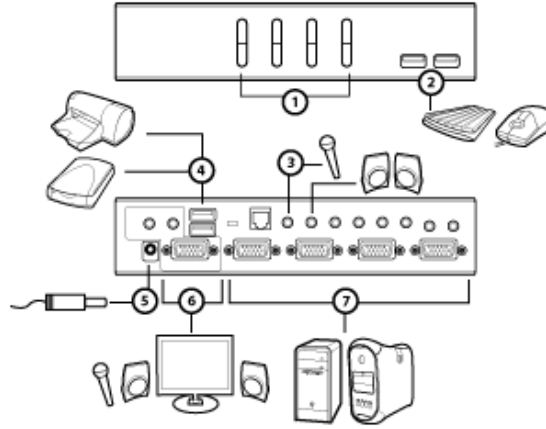

Requirements:

Computers with USB or PS/2 connections (additional cables needed for PS/2 computers, USB peripheral ports won't function when use PS/2 cables) Windows 98, 98SE, ME, 2000, XP Mac OS 8.6 or greater Sun Solaris work station Linux, UNIX and other USB supported systems* *Additional drivers and support may be needed

Package Content:

- 1 x 4-port KVM switch
- 2 x USB KVM cables (part#2L5301U) and
- 2 x USB KVM cables (part #2L5302U)
- 1 x quick start guide
- 1 x user manual
- 1 x Firmware upgrade cable

Specification :

* Master Carton	
Width	12 in.
* Master Carton Qty.	5
Depth	20.5 in.
Height	7.75 in.
*** Unit Package Dimensions	
Depth	11 in.

Height	7 in.
Width	4 in.
Computer Connections	
Direct	4
Emulation	
Mouse	USB Plug-n-Play
Keyboard	USB Plug-n-Play
LEDs	
USB Peripherals	4
Selected	4
On Line	4
Console Connectors	
Monitor	1 x HDB-15 Female (Std. VGA/SVGA)
Keyboard	1 x USB Type A
Audio	1 x stereo speaker; 1 x Microphone
Flash ROM Upgrade	1 x RJ11 socket
Mouse	1 x USB Type A
Power	
Voltage	DC 5V
Amps	2.1A
Housing	
Case	Metal
Weight	
Unit Pack Wt.	4 lbs.
Master Carton Wt.	24 lbs.
CPU Connectors	
Audio	4 x stereo speaker; 4 x Microphone
Keyboard, Mouse, and Monitor	4 x SPDB15
Peripherals	2 x USB Type A
Scan Interval	5 sec.
Video Resolution	2048x1536 (Max.); DDC/ DDC2B/ DDC2AB
Peripheral Sharing	USB, selected through Hotkeys
Humidity	0 - 80% RH
Storage Temperature	-20 - 60 C
Power Consumption	Bus powered, power adapter for additional power
Operating Temperature	4 - 40 C
Port Selection	Push button, Hot Keys